


ROTISSERIE "FauxFlame" RANGE

REF.: FF1425.4E.SS

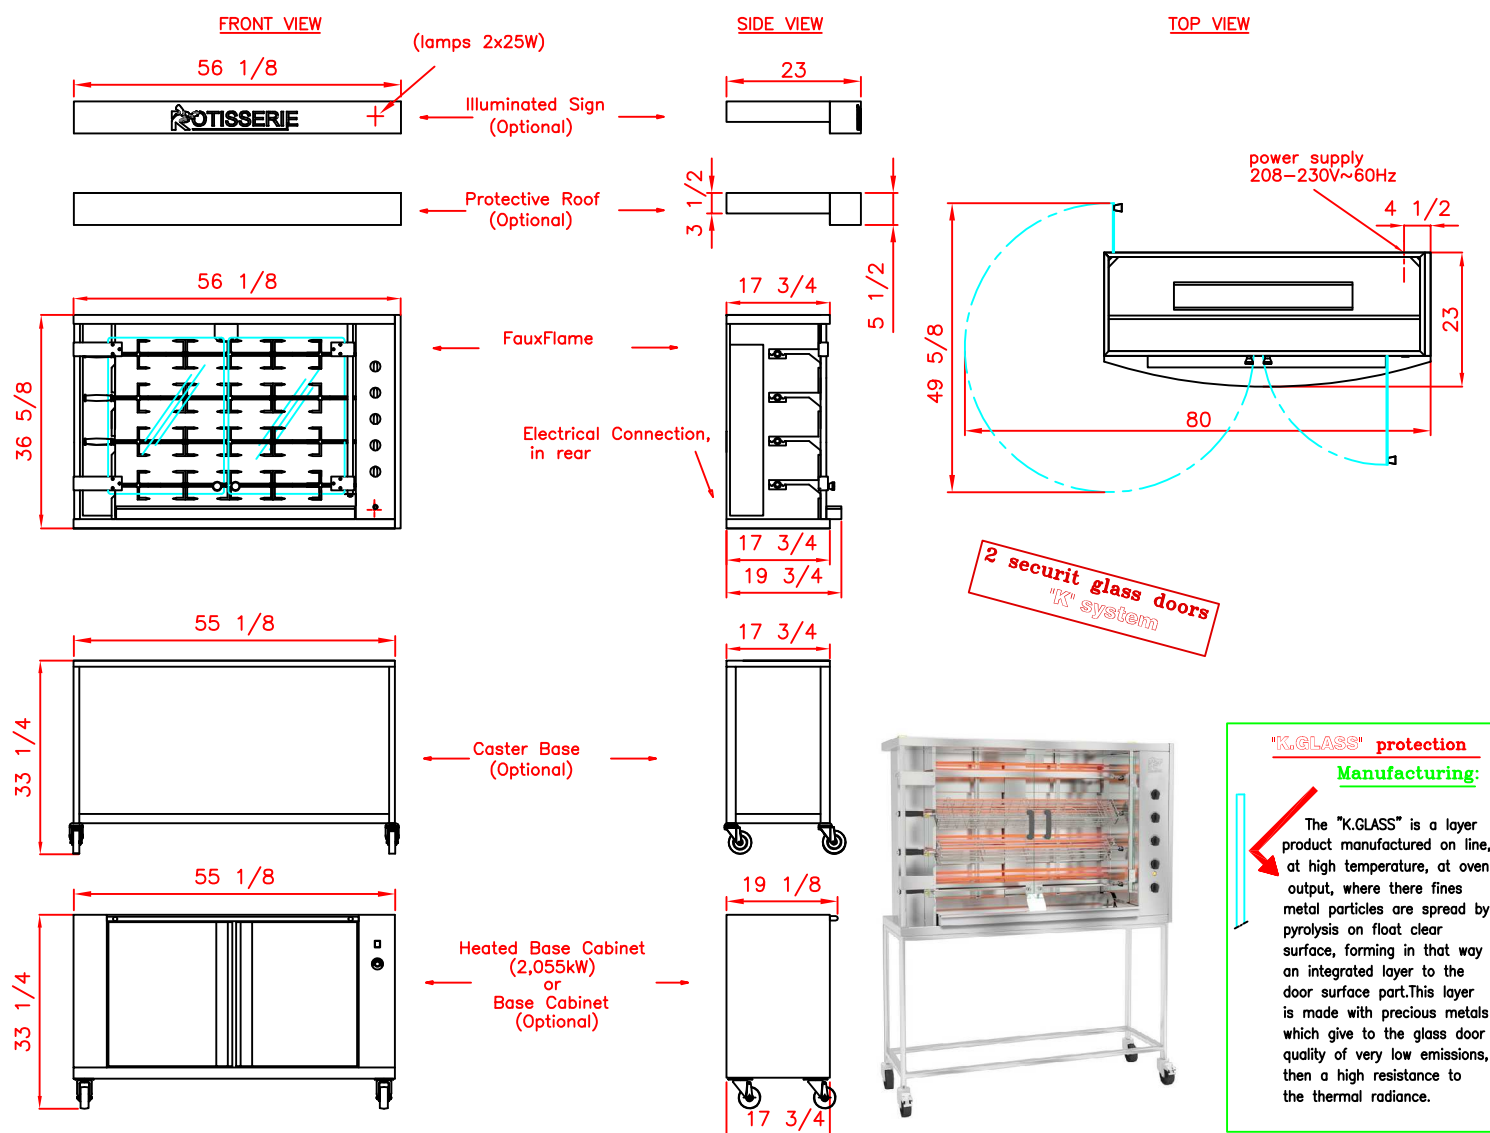

SPECIFICATIONS

Weight : 242 Lbs

Capacity 20/24 poultry, 4 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FF1425.4G.SS with protective glass doors K'Glass.

Power supply: 3 phases+neutral+earth (208-230V~60Hz); 57,5 Amps, wire length 6'.

Electrical power 20,62 kW made up of:

_4 floating motors of 50 W, 1 halogen lamp 150 W (optional)

_13 resistors of 1,55 kW,

2 lamps of 25w for illuminated sign (optional).

OPTIONS: Specific color ref: COUL2, Caster base ref: 1425PR4, basement storage ref: 1425SR4, heated base cabinet with doors ref: 1425SC4 (2.055 kilowatts to add to the electric power of the rotisserie). Illuminated sign. ref: 1425BDI, protective roof ref: 1425TPS. Lighting ref.: ECLAIR, motor 24V ref.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover ref.: DEC.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.