


ROTISSERIE "FauxFlame" RANGE REF.: FF1425.8E.SS

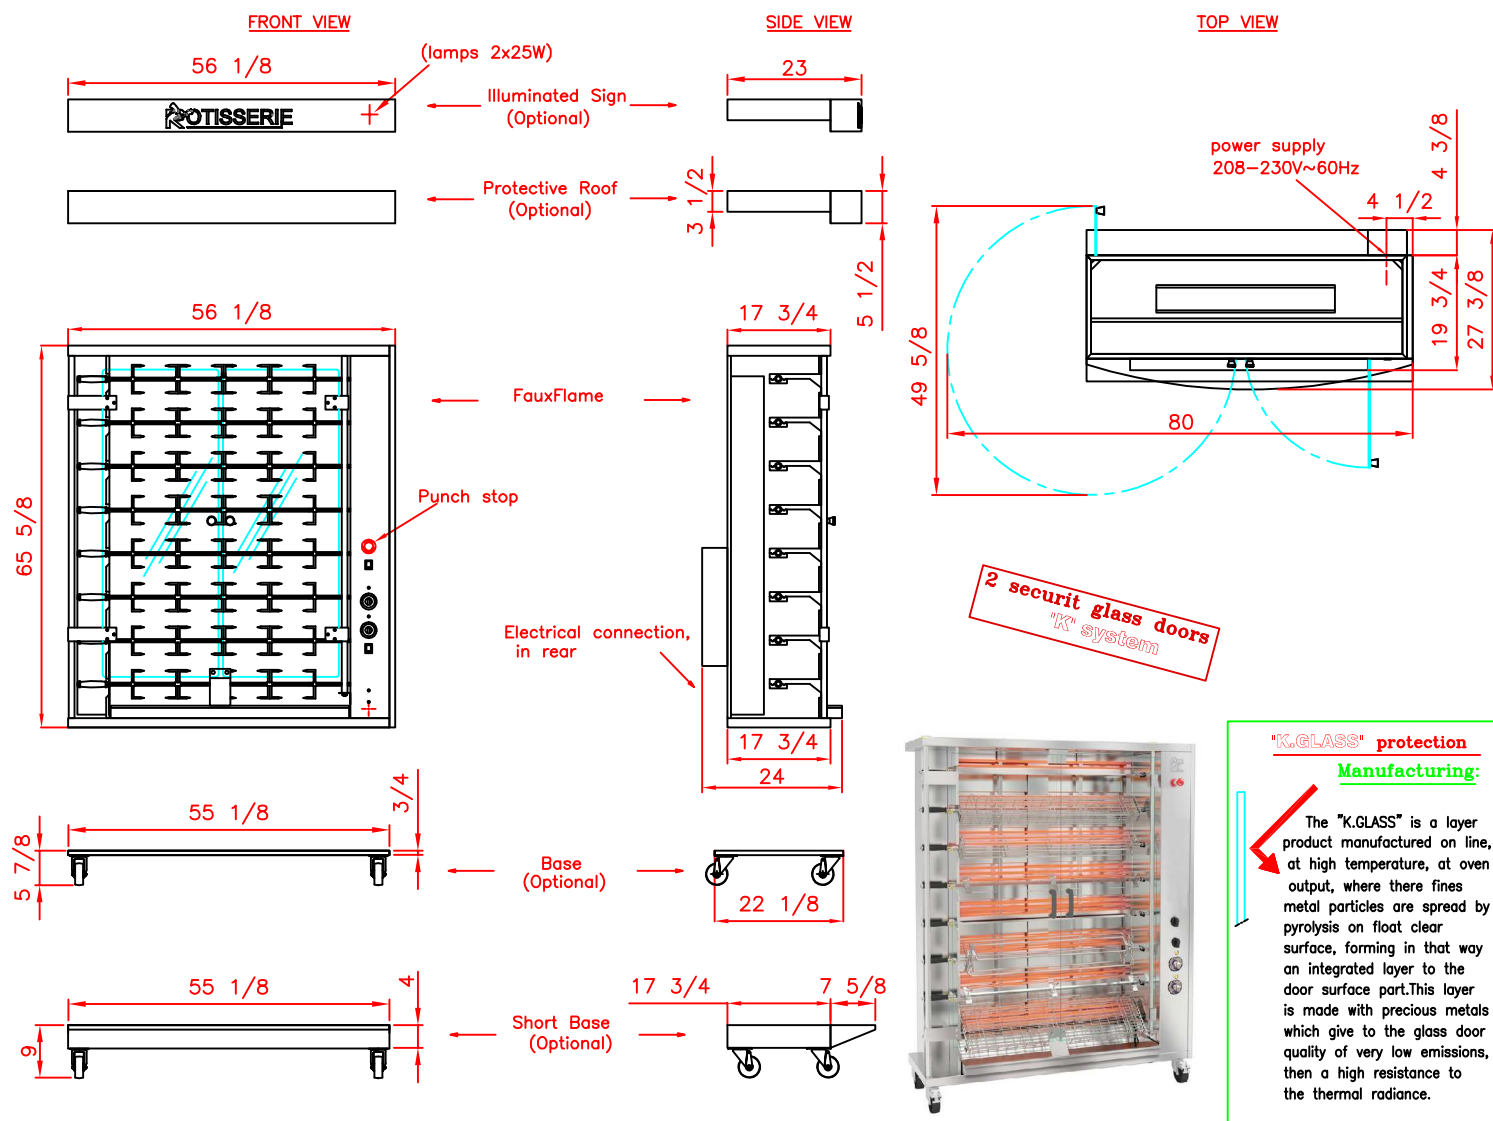

SPECIFICATIONS

Weight: 397 Lbs

Capacity 40/48 poultries, 8 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FF1425.8E.SS

with protective glass doors Securit,

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 92 Amps, wire length 6'.

Electrical power 33,14 kW made up of:

_8 floating motors of 50 W, 1 halogen lamp 150 W (optional)

_21 resistors of 1,55 kW,

2 lamps of 25w for illuminated sign (optional).

OPTIONS: Specific color ref.: COUL2, base ref.: 1425PR8, short base ref: 1425DEBSHORT

Illuminated sign. ref: 1425BDI, protective roof ref: 1425TPS.

Lighting ref.: ECLAIR, motor 24V ref.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover ref.: DEC.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.