


ROTISSERIE "FauxFlame" RANGE REF.: FF1425.6E.SS

FRONT VIEW

SIDE VIEW

TOP VIEW

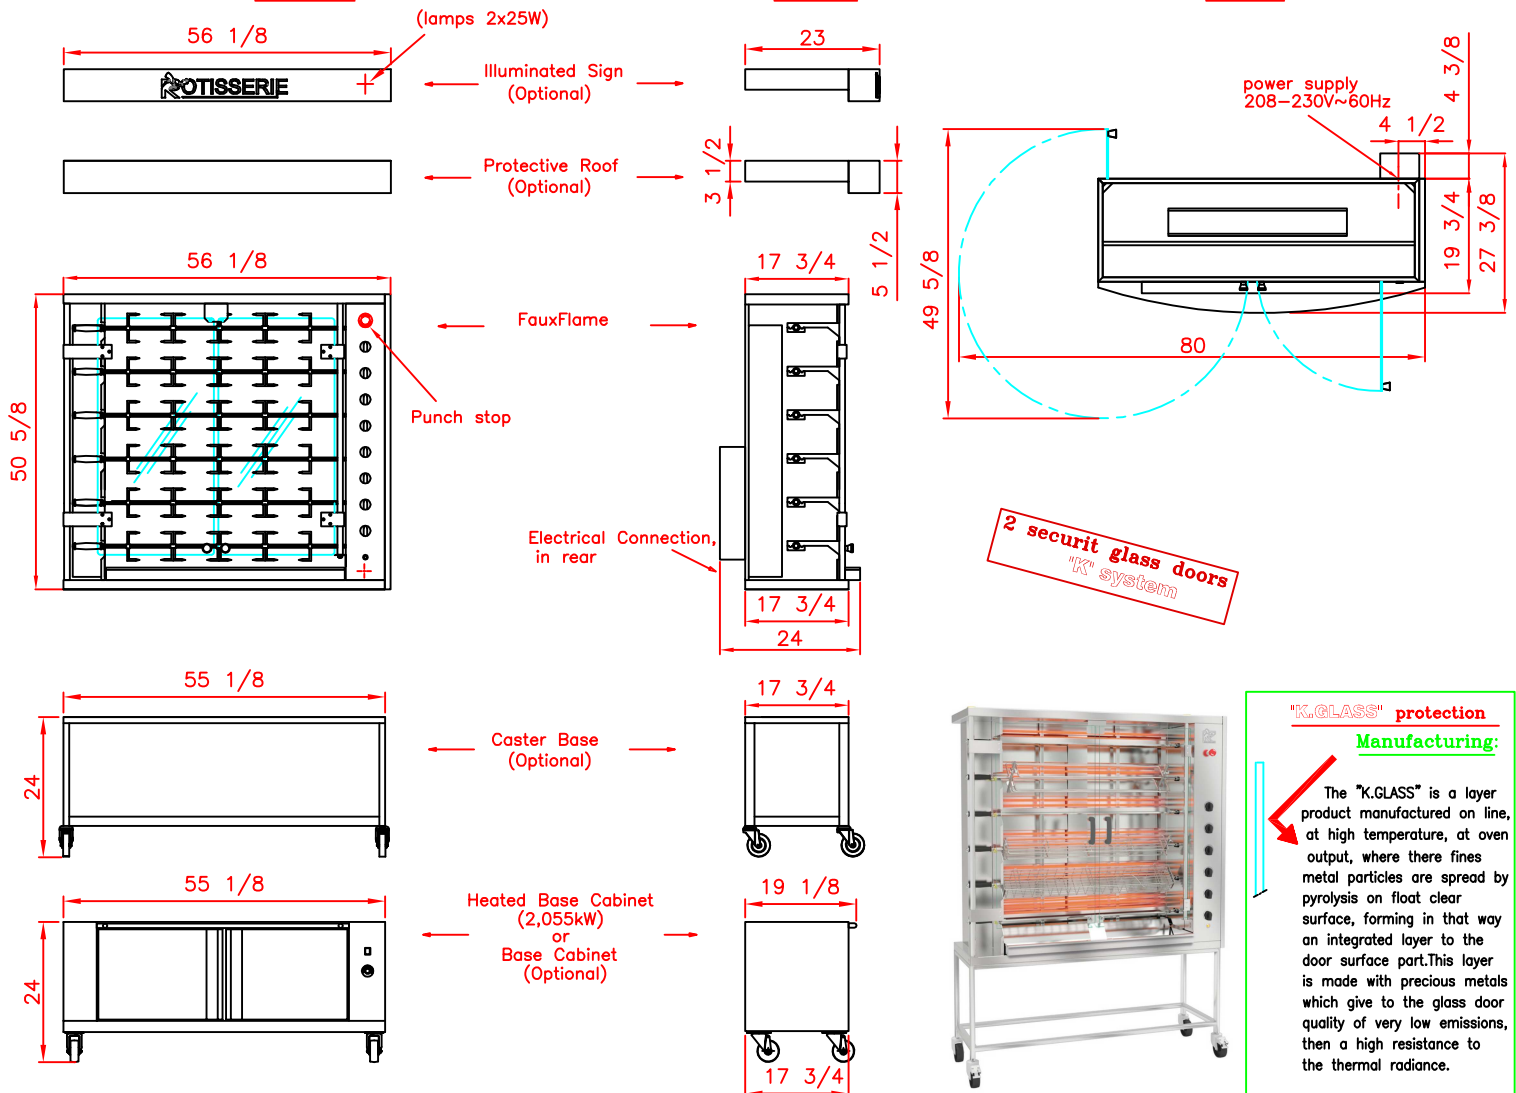

SPECIFICATIONS

Weight : 330 Lbs

Capacity 30/36 poultry, 6 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FF1425.6E.SS with protective glass doors K'Glass.

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 83,5 Amps, wire length 6'.

Electrical power 29,98 kW made up of:

_6 floating motors of 50 W, 1 halogen lamp 150 W (optional)

_19 resistors of 1,55 kW,

2 lamps of 25w for illuminated sign (optional).

OPTIONS: Specific color ref.: COUL2, Caster base ref.: 1425PR6, basement storage ref.: 1425SR6,

heated base cabinet with doors ref: 1425SC6 (2.055 kilowatts to add to the electric power of the rotisserie).

Illuminated sign. ref: 1425BDI, protective roof ref: 1425TPS. Lighting ref.: ECLAIR, motor 24V ref.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover ref.: DEC.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.