


ROTISSERIE "FauxFlame" RANGE

REF.: FFS1175.4G.SS

COOKING "ALTERNATIVE AND CONTINUOUS ROTATION"

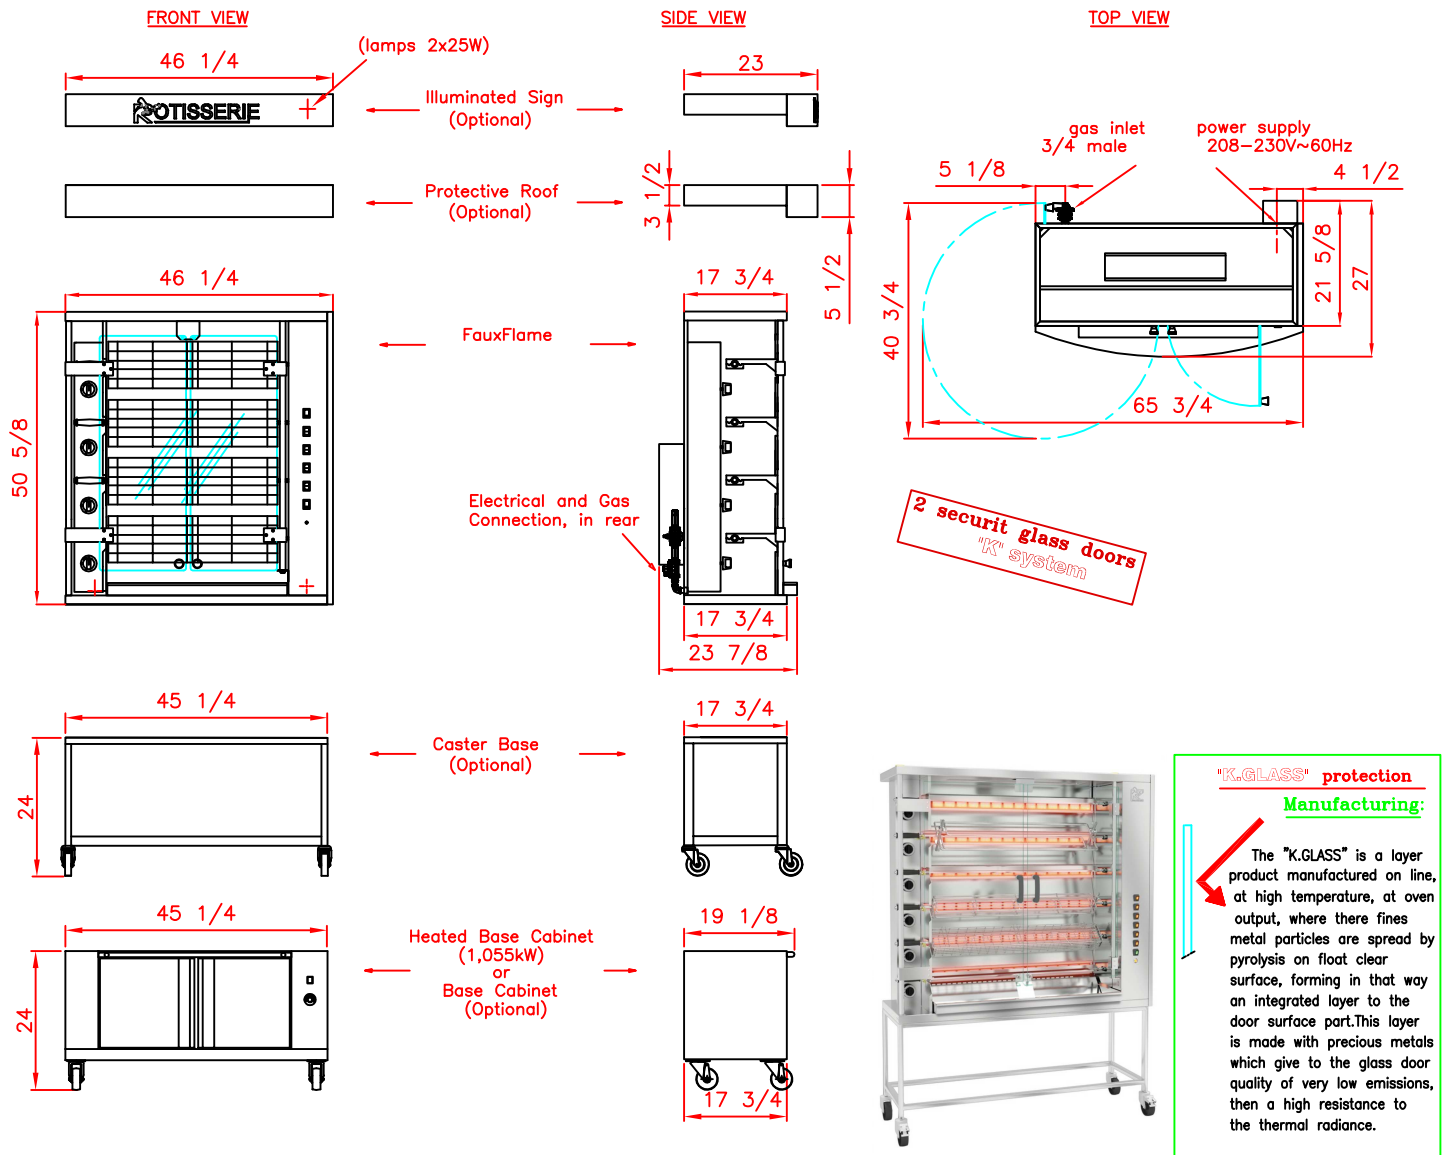

SPECIFICATIONS

Weight : 275 Lbs

Capacity: 16/20 poultries, 12/16 open poultries (Spatchcock chicken), 4 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FFS1175.4G.SS

with protective glass doors K'Glass, radiant type burner,

Power supply: 1 phase+neutral+earth (208-230V~60Hz), 2,5 Amps, wire length 6'.

Electrical power 0,47 kW made up of:

_4 floating motors of 50 W, 1 halogen lamp 150 W (optional)

2 lamps of 25w for illuminated sign (optional).

Gas power: 52000 BTU/h

OPTIONS: Specific color ref.: COUL2, Caster base ref.: 1175PR6, basement storage ref.: 1175SR6, heated base

cabinet with doors ref: 1175SC6 (1.055 kilowatts to add to the electric power of the rotisserie). Illuminated

sign. ref: 1175BDI, protective roof ref: 1175TPS, gas connection. Lighting re.: ECLAIR, motor 24V re.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover re.: DEC, torch lighter ref: AT

All this Information are the property of Rotisol. Reproduction partial or In totality are prohibited without authority prior written of compagny Rotisol.