


ROTISSERIE "FauxFlame" RANGE REF.: FF1175.4G.SS

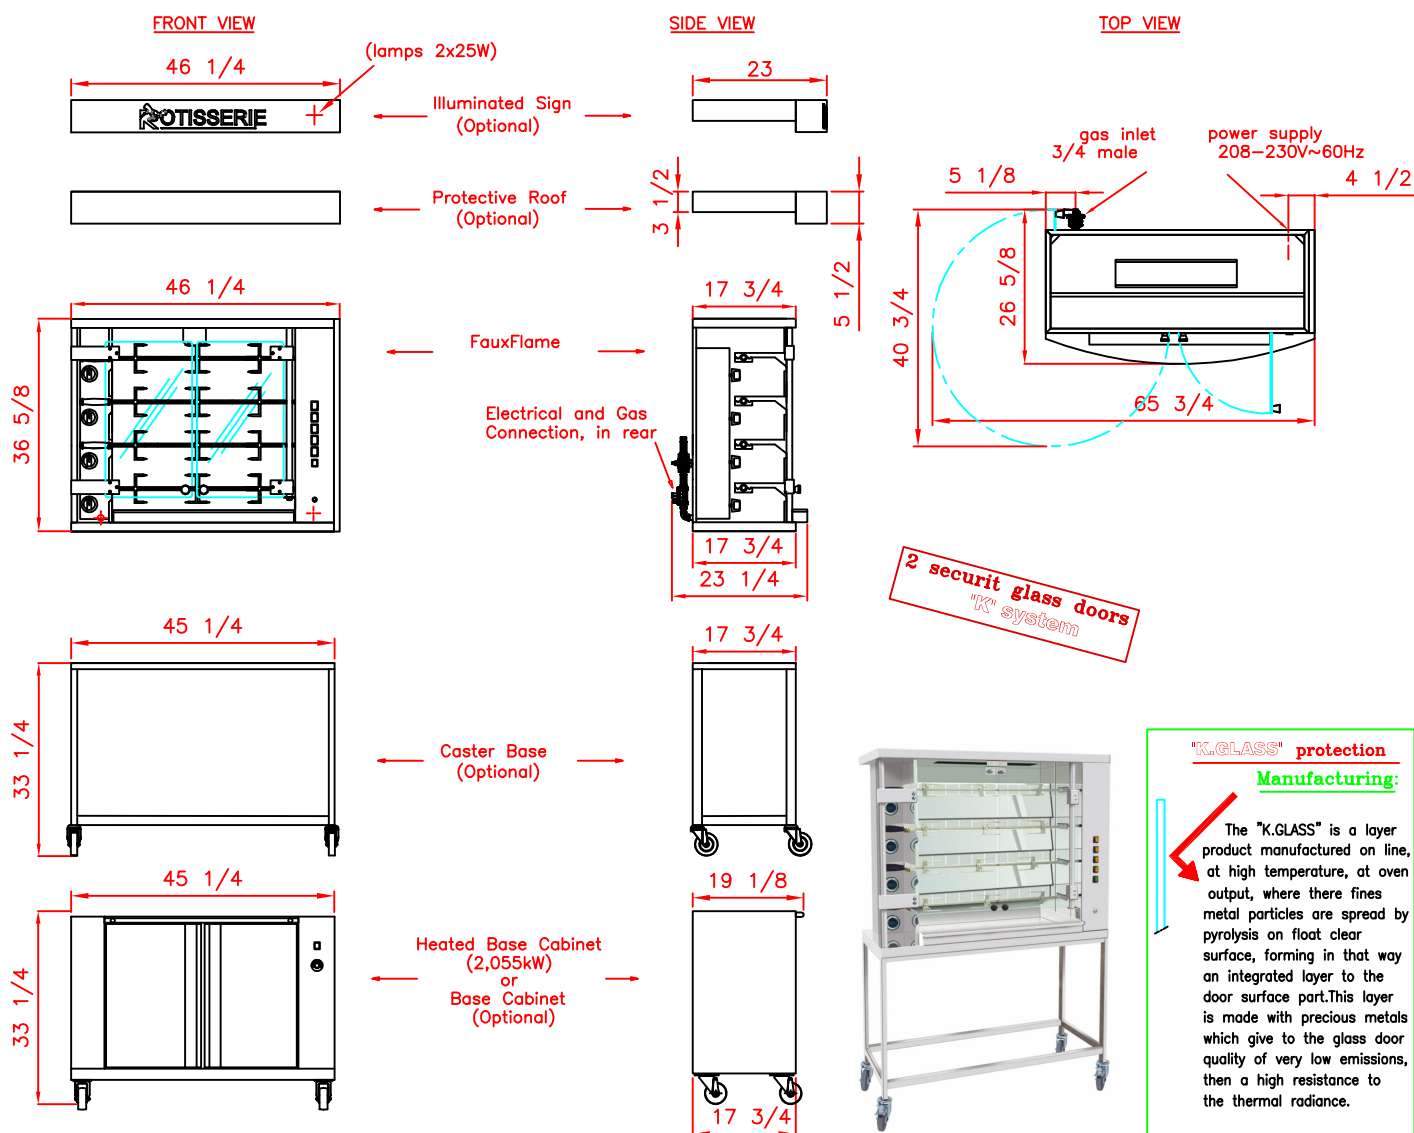

SPECIFICATIONS

Weight : 200 Lbs

Capacity 16/20 poultry, 4 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FF1175.4G.SS

with protective glass doors K'Glass, radiant type burner,

Power supply: 1 phase+neutral+earth (208-230V~60Hz), 2,5 Amps, wire length 6'.

Electrical power 0,47 kW made up of:

_4 floating motors of 50 W, 1 halogen lamp 150 W (optional)

2 lamps of 25w for illuminated sign (optional).

Gas power: 52000 BTU/h

OPTIONS: Specific color ref.: COUL2, Caster base ref.: 1175PR4, basement storage ref.: 1175SR4,

heated base cabinet with doors ref: 1175SC4(2.055 kilowatts to add to the electric power of the rotisserie).

Illuminated sign. ref: 1175BDI, protective roof ref: 1175TPS, gas connection. Lighting ref: ECLAIR,

motor 24V ref: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover re.: DEC, torch lighter ref: AT

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.