
ROTISSERIE "FauxFlame" RANGE REF.: FFS1175.6G.SS COOKING "ALTERNATIVE AND CONTINUOUS ROTATION"

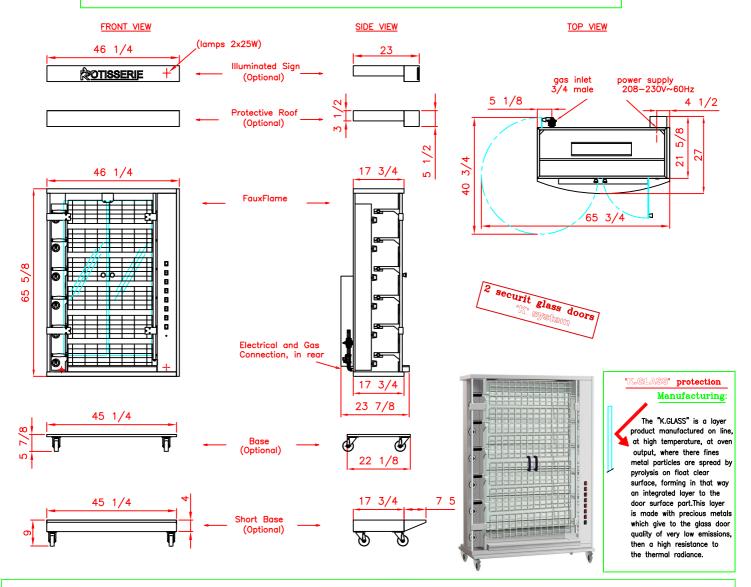

SPECIFICATIONS

Weight: 375 Lbs

Capacity: 24/30 poultries, 18/24 open poultries (Spatchcock chicken), 6 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FFS1175.6G.SS

with protective glass doors K'Glass, radiant type burner,

Power supply: 1 phase+neutral+earth (208-230V~60Hz), 3 Amps, wire length 6'.

Electrical power 0,53 kW made up of:

_6 floating motors of 50 W, 1 halogen lamp 150 W (optional)

2 lamps of 25w for illuminated sign (optional).

Gas power: 61500 BTU/h

OPTIONS: Specific color ref:. COUL2, base ref.: 1175PR8, short base ref: 1175DEBSHORT

Illuminated sign. ref: 1175BDI, protective roof ref: 1175TPS. Gas connection. Lighting re.: ECLAIR, motor 24V re.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover re.: DEC, torch lighter ref: AT

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.



Scale: 1/33 December 2018