


# ROTISserie "FauxFlame" RANGE REF.: FFS1425.6G.SS COOKING "ALTERNATIVE AND CONTINUOUS ROTATION"

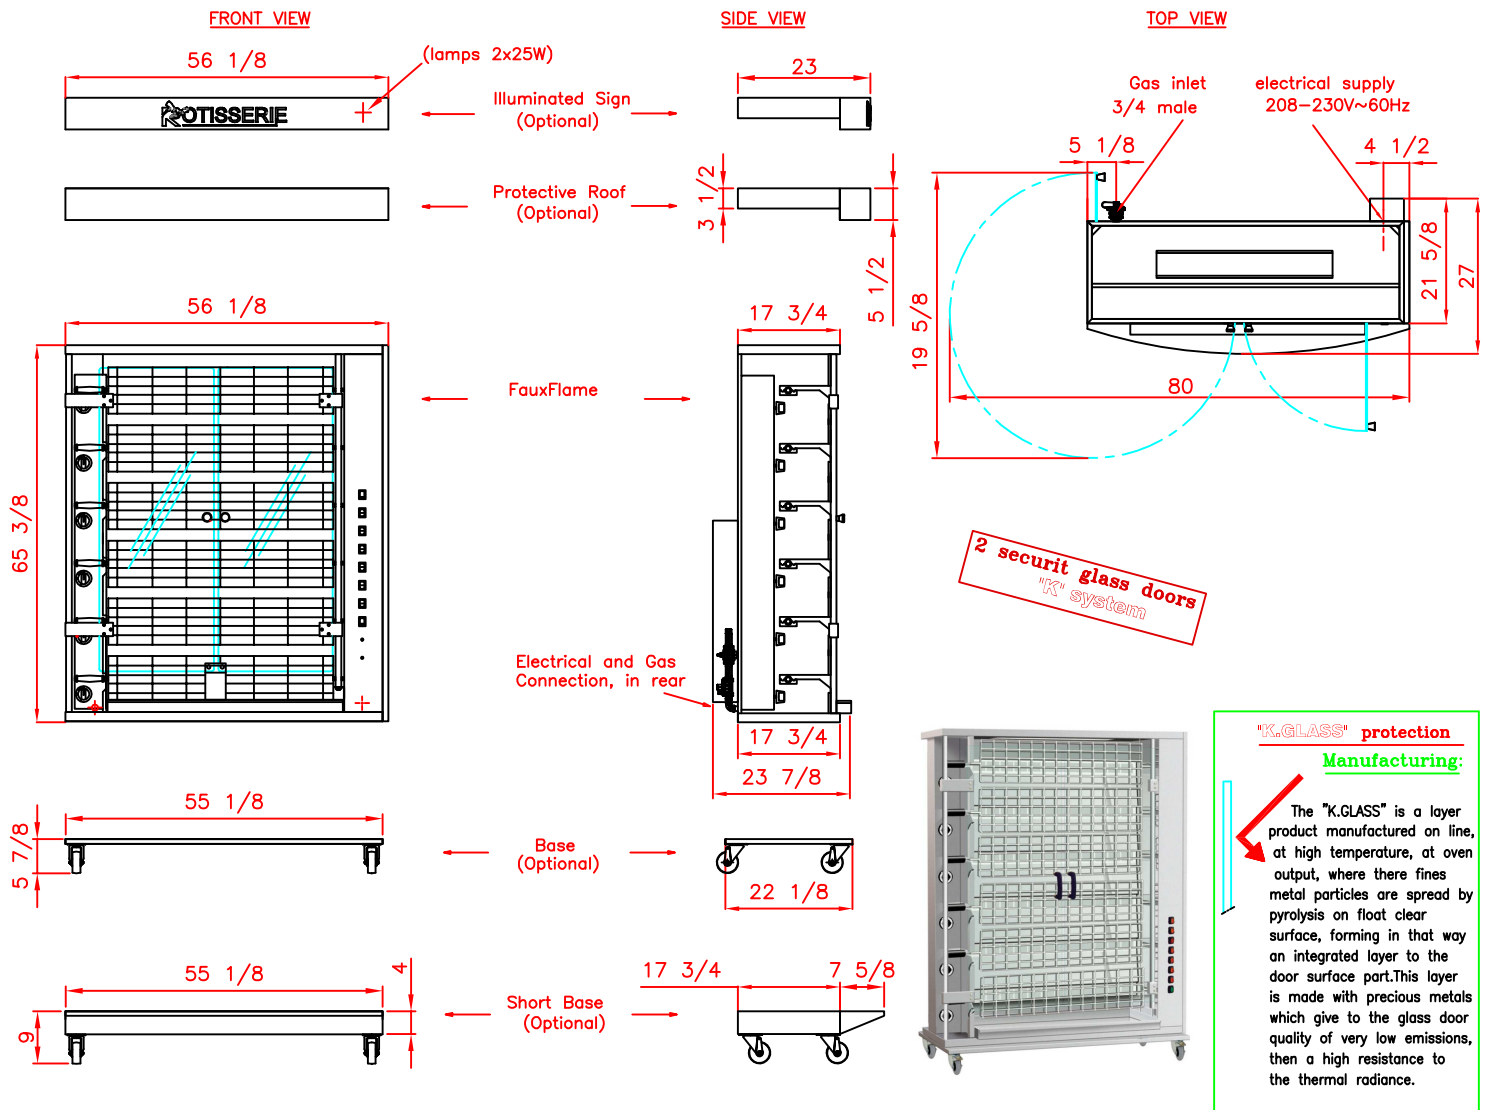

## SPECIFICATIONS

Weight : 465 Lbs

Capacity: 30/36 poultries, 24/30 open poultries (Spatchcock chicken), 6 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FFS1175.6G.SS

with protective glass doors K'Glass, radiant type burner,

Power supply: 1 phase+neutral+earth (208-230V~60Hz), 3 Amps , wire length 6'.

Electrical power 0,53 kW made up of:

\_6 floating motors of 50 W, 1 halogen lamp 150 W (optional)

2 lamps of 25w for illuminated sign (optional).

Natural gas power: 91000 BTU/h

OPTIONS: Specific color ref.: COUL2, base ref.: 1175PR8, short base ref: 1175DEBSHORT

Illuminated sign. ref: 1175BDI, protective roof ref: 1175TPS.

Gas connection. Lighting re.: ECLAIR, motor 24V re.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover re.: DEC, torch lighter ref: AT

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.