


ROTISSERIE "FauxFlame" RANGE REF.: FF1425.6G.SS

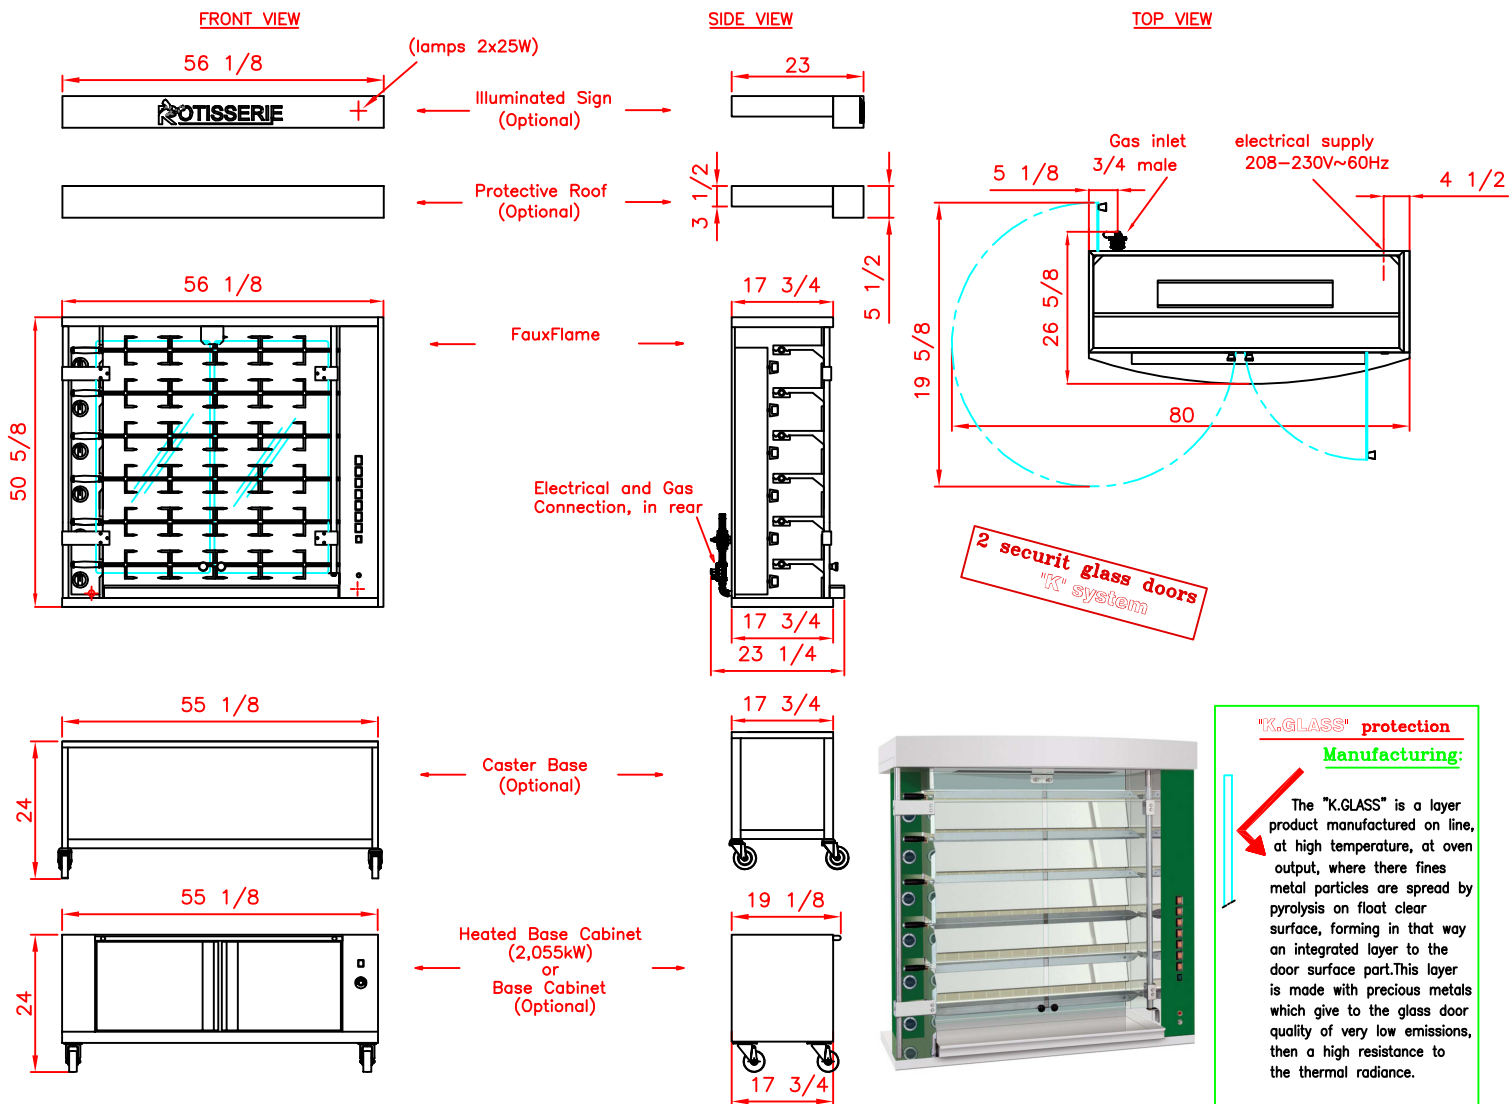

SPECIFICATIONS

Weight : 375 Lbs

Capacity 30/36 poultry, 6 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FF1425.6G.SS

with protective glass doors K'Glass, radiant type burner,

Power supply: 1 phase+neutral+earth (208-230V~60Hz), 3 Amps , wire length 6'.

Electrical power 0,53 kW made up of:

_6 floating motors of 50 W, 1 halogen lamp 150 W (optional)

2 lamps of 25w for illuminated sign (optional).

Gas power: 113000 BTU/h

OPTIONS: Specific color ref: COUL2, Caster base ref: 1425PR6, basement storage ref: 1425SR6, heated base cabinet with doors ref: 1425SC6 (2.055 kilowatts to add to the electric power of the rotisserie). Illuminated sign. ref: 1425BDI, protective roof ref: 1425TPS, gas connection. Lighting re.: ECLAIR, motor 24V re.: 24V
OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover re.: DEC, torch lighter ref: AT

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.