


# ROTISSERIE "FauxFlame" RANGE

## REF.: FF1425.8G.SS

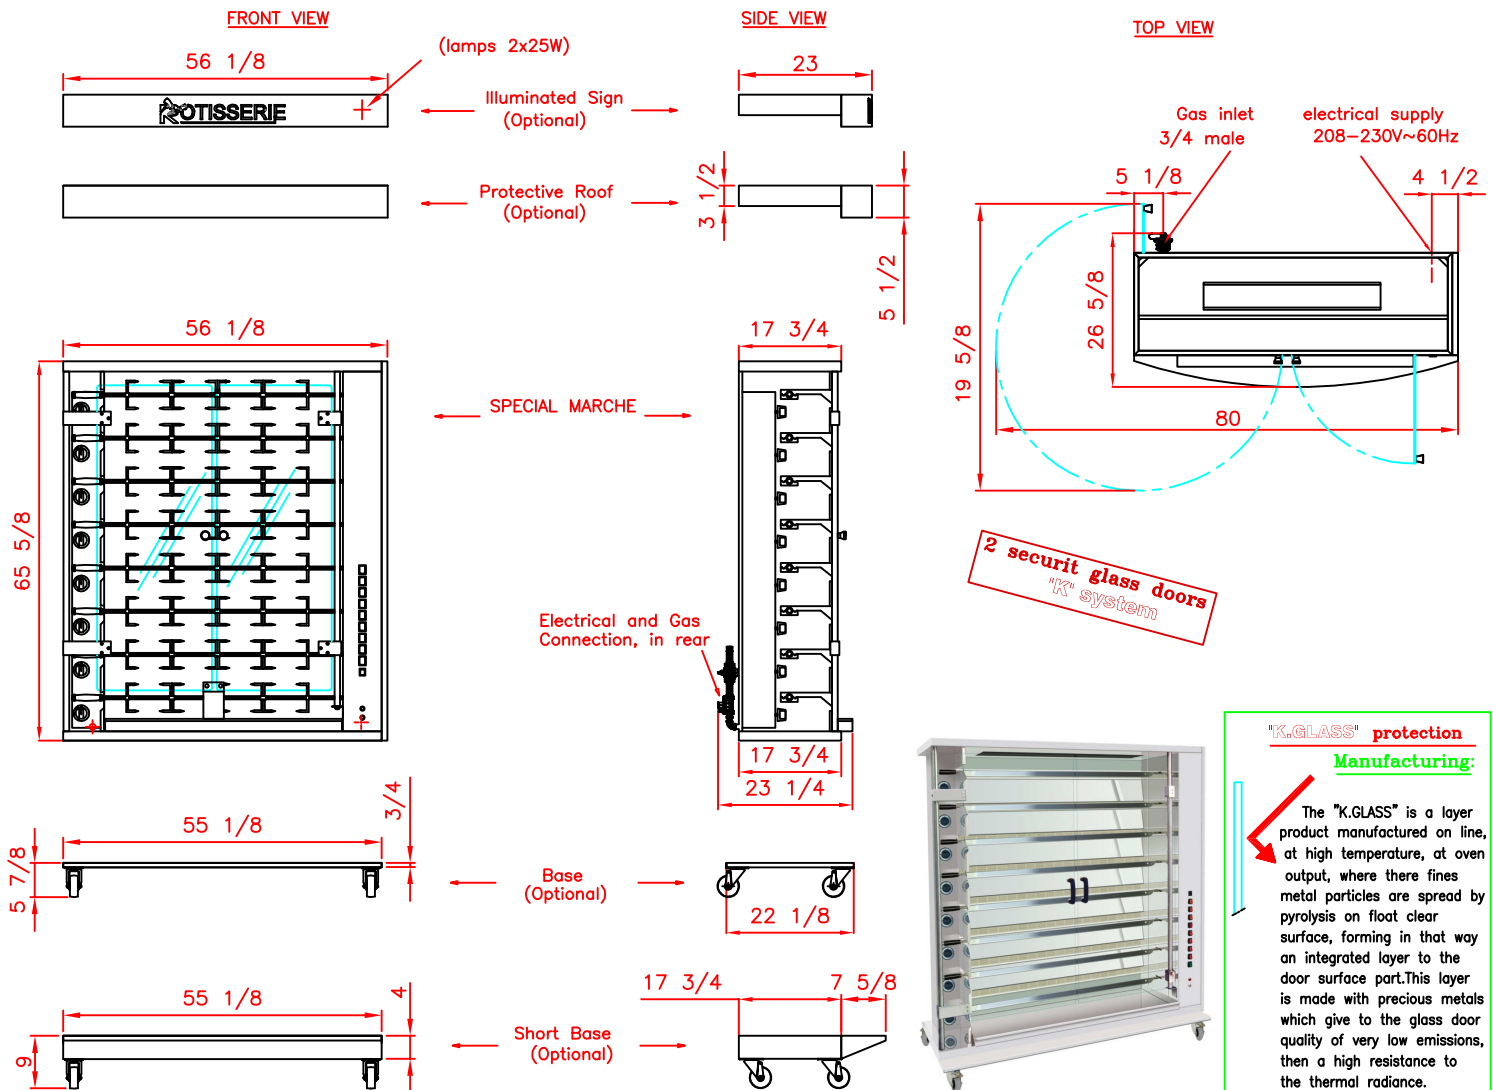

### "K.GLASS" protection Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

## SPECIFICATIONS

Weight: 495 Lbs

Capacity 40/48 poultries, 8 adjustable spits

All stainless steel with brass or chrome rotisserie ref: FF1425.8G.SS

with protective glass doors K'Glass, radiant type burner,

**Power supply: 1 phase+neutral+earth (208-230V~60Hz), 3 Amps , wire length 6'.**

**Electrical power 0,59 kW** made up of:

\_8 floating motors of 50 W, 1 halogen lamp 150 W (optional)

2 lamps of 25w for illuminated sign (optional).

**Natural gas power: 121000 BTU/h**

OPTIONS: Specific color ref.: COUL2, base ref.: 1425PR8, short base ref: 1425DEBSHORT

Illuminated sign. ref: 1425BDI, protective roof ref: 1425TPS.

Gas connection. Lighting re.: ECLAIR, motor 24V re.: 24V

OPTION, ACCESSORIES: spits, prongs, grid elevated, spit mover re.: DEC, torch lighter ref: AT

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.