


ROTISSERIE "FlamBoyant" RANGE

REF.: FB1160.6E.SSP or REF.: FB1160.6E.SS

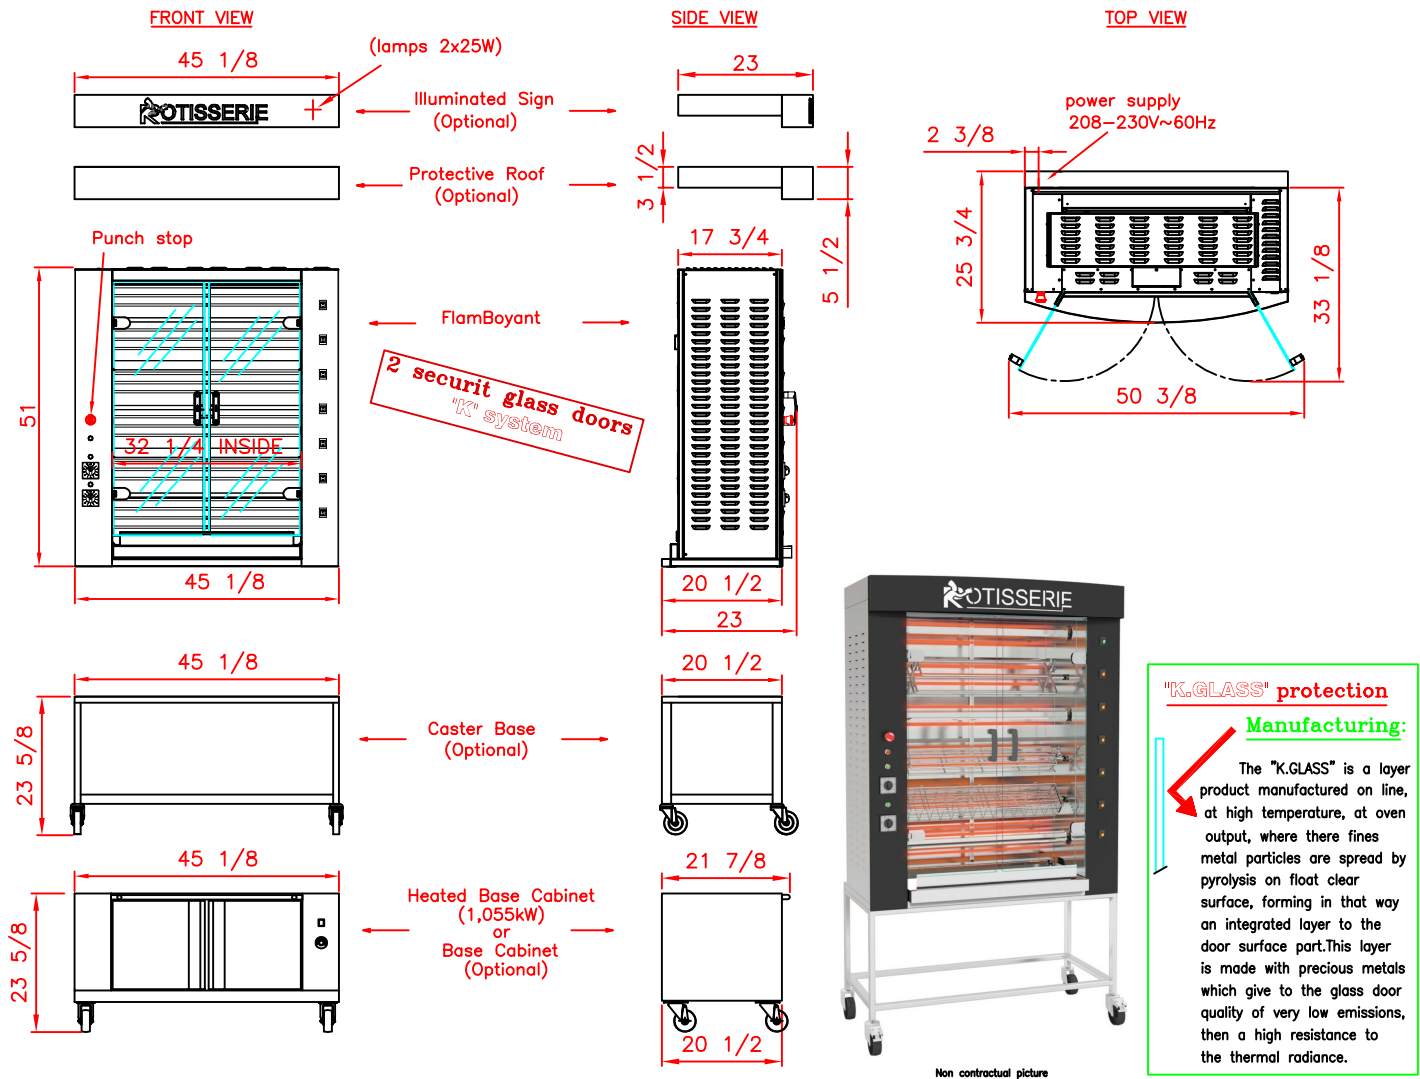

SPECIFICATIONS

Weight: 282 Lbs

Capacity: 24/30 poultries, 24/30, 6 adjustable spits

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: FB1160.6E.SSP

All stainless steel with brass or chrome rotisserie ref: FB1160.6E.SS

Stainless steel AISI 430 with thickness 15/256 (for use in food preparation), stainless surface with protective glass doors K'Glass,

2 heating zones of 3 spits managed by 2 Timers: heating time adjustable from 0 to 2 hours automatically programming the end of the cooking by timer = safety

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 54,5 Amps, wire length 6'.

Electrical power 19,4 kW made up of:

—19 resistors of 1 kW

—6 motors of 40 W nominal with output drive shaft of all-metal gears $\varnothing 1/2$

1 halogen lamp of 150W, 1 lamp of 25w for illuminated sign (option).

OPTIONS: Specific color ref.: COUL2, Caster base ref.: 1160PR6, basement storage ref.: 1160SR6,

heated base cabinet with doors ref: 1160SC6 (1,055 kilowatts to add to the electric power of the rotisserie). Illuminated sign. ref: 1160BDI or 1160BDE, protective roof ref: 1160TPS.

OPTIONS ACCESSORIES: spits, vertical spit system, prongs, spit removers ref: DEC.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.