


ROTISSERIE "FlamBoyant" RANGE

REF.: FB1400.4E.SSP or REF.: FB1400.4E.SS

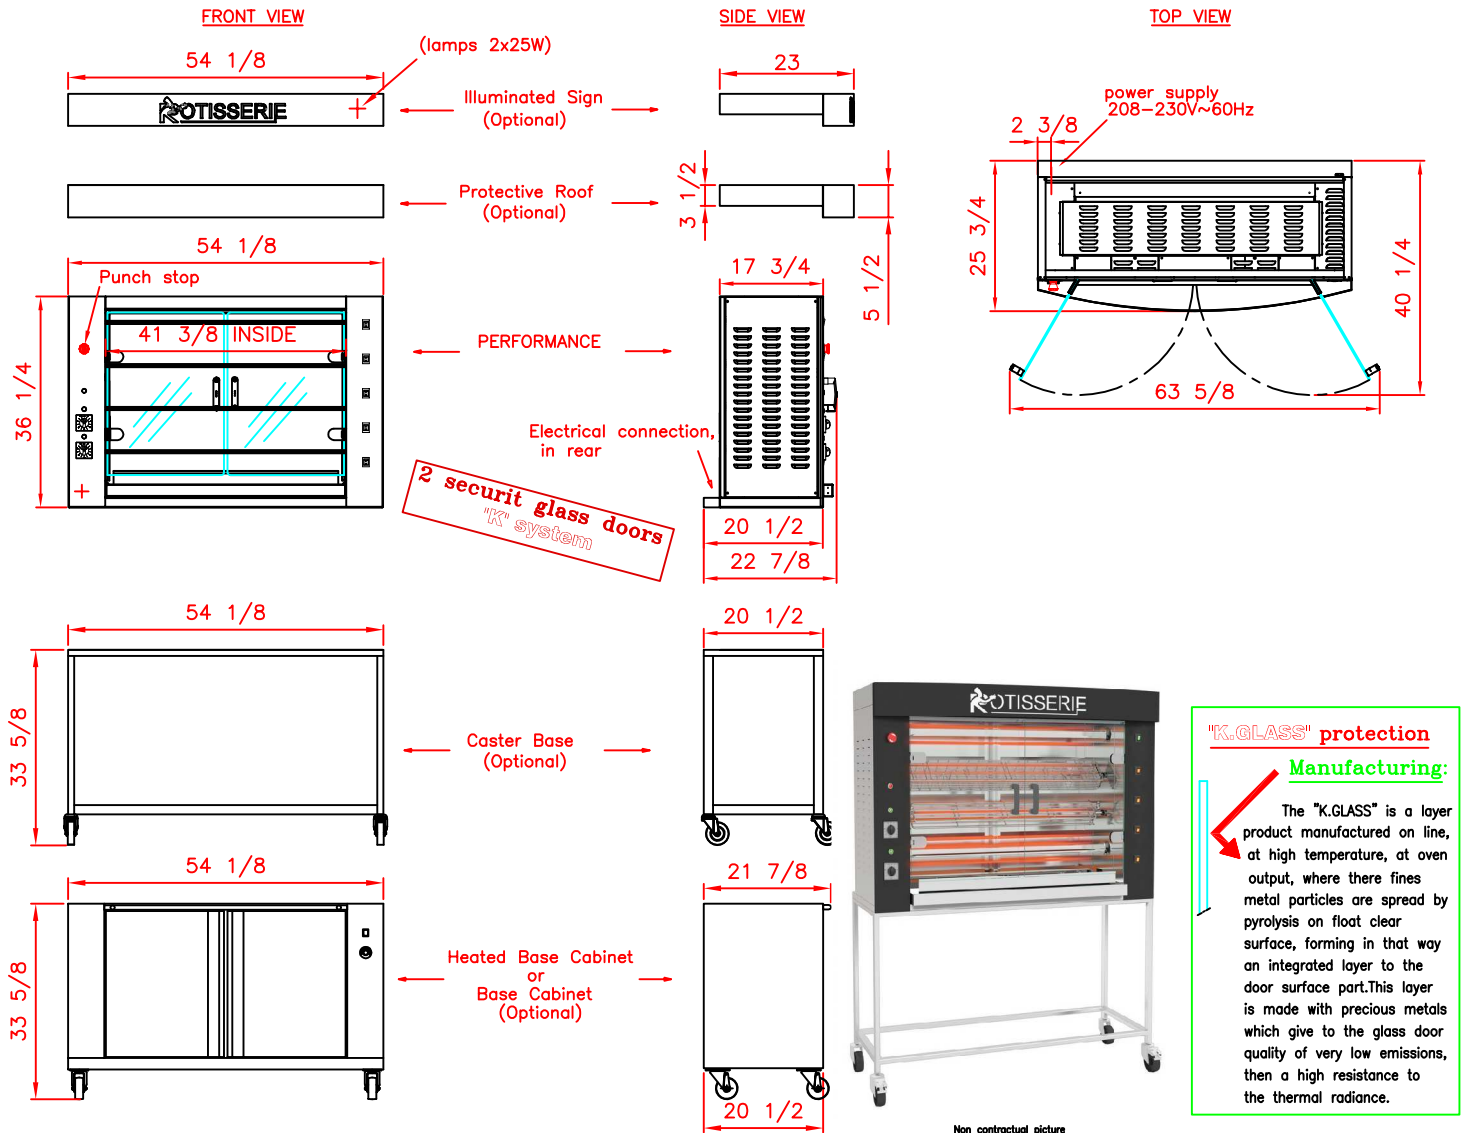

SPECIFICATIONS

Weight: 262 Lbs

Capacity 20/24 poultries, 4 adjustable spits

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: FB1400.4E.SSP

All stainless steel with brass or chrome rotisserie ref: FB1400.4E.SS

Stainless steel AISI 430 with thickness 15/256 (for use in food preparation), stainless surface with protective glass doors K'Glass,

2 heating zones of 2 spits managed by 2 Timers: heating time adjustable from 0 to 2 hours automatically programming the end of the cooking by timer = safety

Power supply: 3 Phases+earth (208-230V~60Hz), 58 Amps, wire length 6'.

Electrical power 20,6 kW made up of:

_13 resistors of 1,55 kW

_4 motors of 40 W nominal with output drive shaft of all-metal gears \varnothing 1/2

2 halogen lamps of 150W, 2 lamps of 25w for illuminated sign.

OPTIONS: Specific color ref.: COUL2, Caster base ref.: 1400PR4, basement storage ref.: 1400SR4, heated base cabinet with doors ref: 1400SC4

Illuminated sign. ref: 1400BDI or 1400BDE, protective roof ref: 1400TPS.

OPTIONS ACCESSORIES: spits, vertical spit system, prongs, spit removers ref: DEC.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.