
ROTISSERIE "FlamBoyant" RANGE REF.: FB1400.8E.SSP or REF.: FB1400.8E.SS

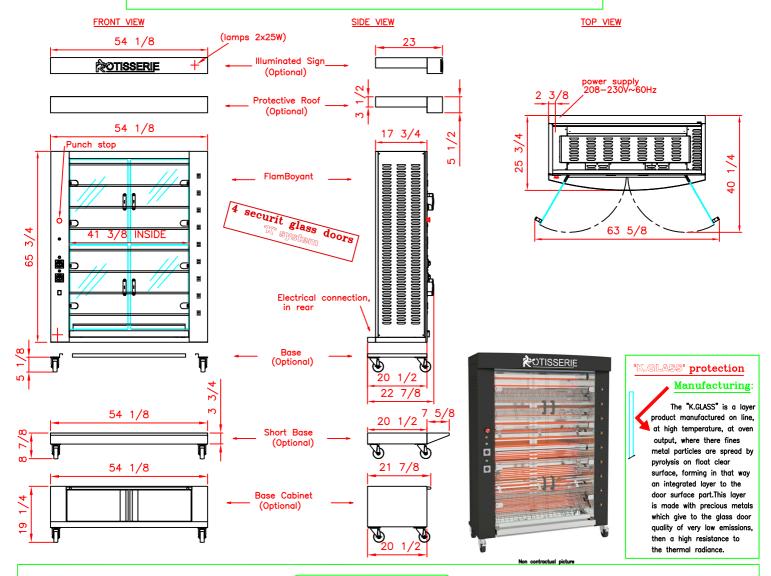

SPECIFICATIONS

Weight: 463 Lbs

Capacity 40/48 poultries, 8 adjustable spits

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: FB1400.8E.SSP All stainless steel with brass or chrome rotisserie ref: FB1400.8E.SS

Stainless steel AISI 430 with thickness 15/256 (for use in food preparation), stainless surface with protective glass doors K'Glass,

2 heating zones of 4 spits managed by 2 Timers: heating time adjustable from

0 to 2 hours automatically programming the end of the cooking by timer = safety

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 101 Amps, wire length 6'.

Electrical power 36,2 kW made up of:

_23 resistors of 1,55 kW

_8 motors of 40 W nominal with output drive shaft of all-metal gears Ø 1/2

2 halogen lamps of 150W, 2 lamps of 25w for illuminated sign (option).

OPTIONS: Specific color ref:. COUL2, base ref.: 1400PR8, short base ref: 1400DEBSHORT, base cabinet ref.: 1400SR8.

Illuminated sign. ref: 1400BDI or 1400BDE, protective roof ref: 1400TPS.

OPTIONS ACCESSORIES: spits, vertical spit system, prongs, spit removers ref: DEC

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.



Scale: 1/33 October 2022