


# ROTISSERIE "FlamBoyant" RANGE

## REF.: FBS1400.6E.SSP or REF.: FBS1400.6E.SS

### COOKING IN "CONTINUOUS AND ALTERNATIVE ROTATION"

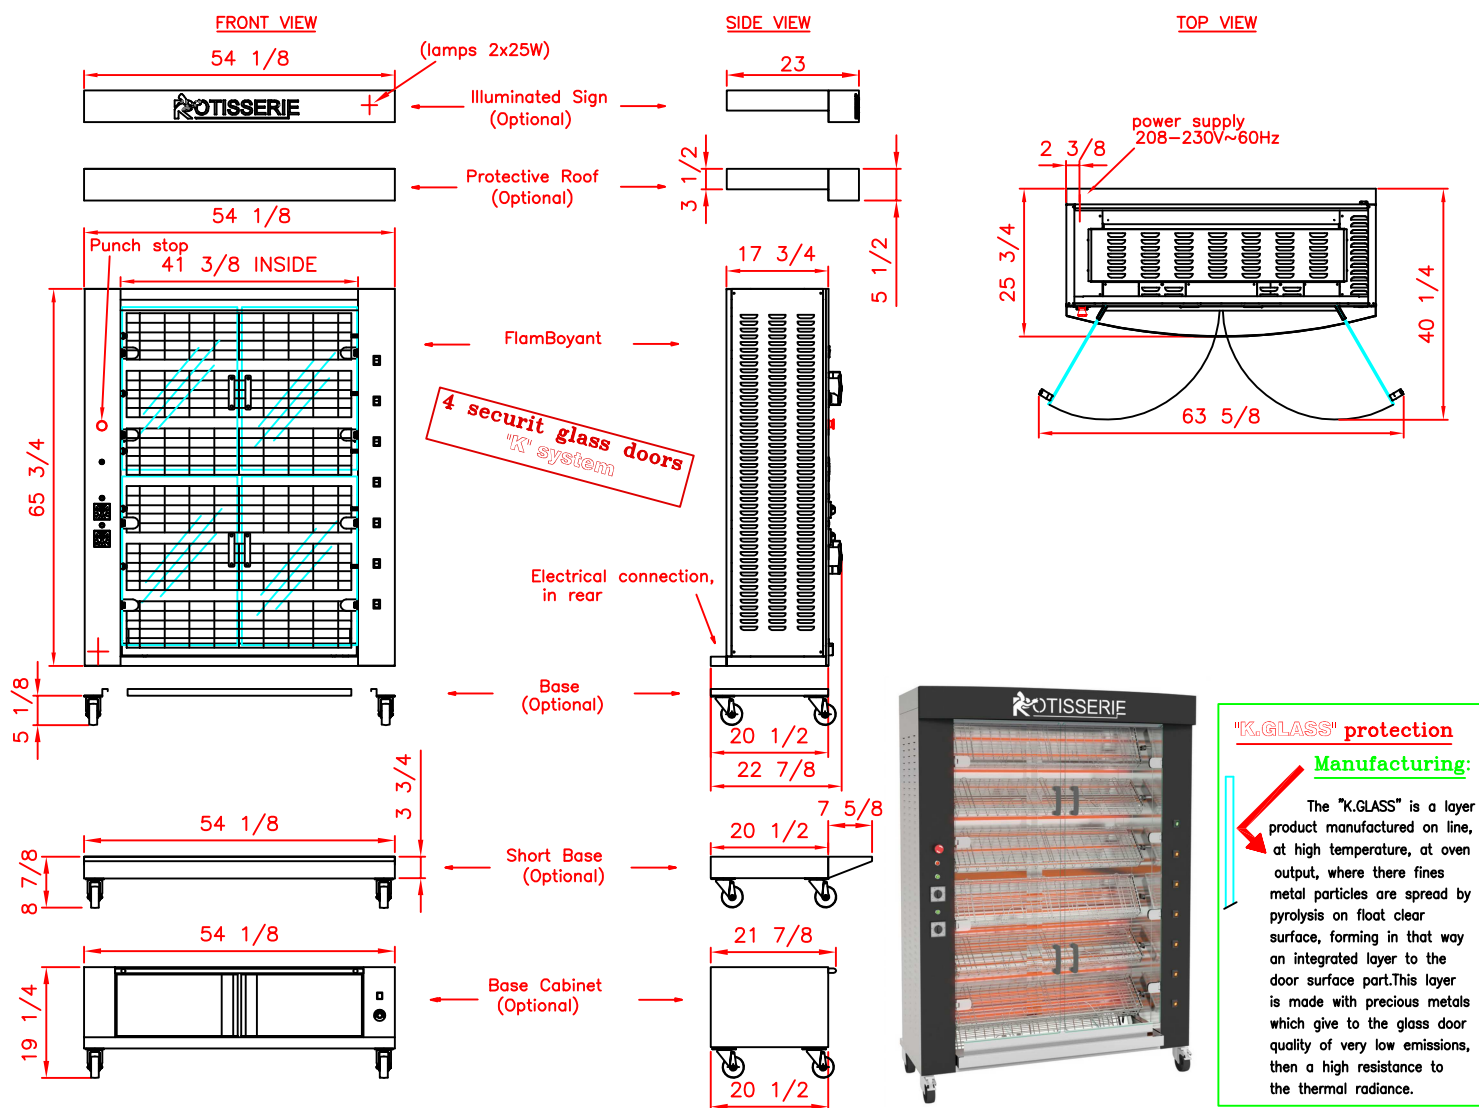

## SPECIFICATIONS

Weight: 419 Lbs

Capacity: 30/36 poultries, 24/30 open poultries (Spatchcock chicken), 6 adjustable spits

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: FBS1400.6E.SSP

All stainless steel with brass or chrome rotisserie ref: FBS1400.6E.SS

Stainless steel AISI 430 with thickness 15/256 (for use in food preparation), stainless surface with protective glass doors K'Glass, radiant type burner,

2 heating zones of 3 spits managed by 2 Timers: heating time adjustable from

0 to 2 hours automatically programming the end of the cooking by timer = safety

**Power supply:** 3 Phases+Neutral+earth (208-230V~60Hz); 97 Amps, wire length 6'.

**Electrical power 36,5 kW** made up of:

\_23 resistors of 1,55 kW

\_6 motors of 40 W nominal with output drive shaft of all-metal gears  $\varnothing$  1/2

2 halogen lamps of 150W, 2 lamps of 25w for illuminated sign (option).

**OPTIONS:** Specific color ref.: COUL2, base ref.: 1400PR8, short base ref: 1400DEBSHORT, base cabinet ref.: 1400SR8.

Illuminated sign. ref: 1400BDI or 1400BDE, protective roof ref: 1400TPS.

**OPTIONS ACCESSORIES:** spits, vertical spit system, prongs, spit removers ref: DEC

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.