
DISPLAY PRESENTATION 5 LEVEL PANORAMIC VENTILATED HEATED CABINET

REF.: 10MCV5LST.PANO

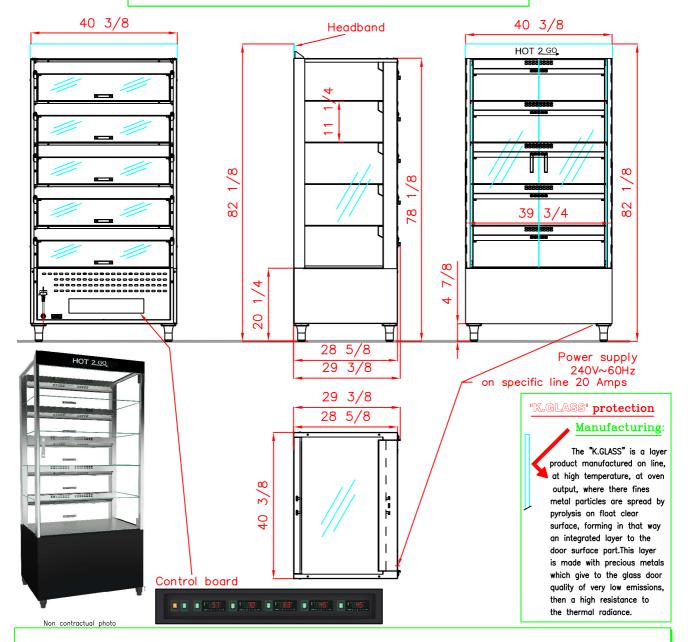

SPECIFICATIONS

Weight: 485 lb

An open self-service cross-section unit with independent loading per floor at the back and the front.

Epoxy exterior body, KGLASS glass and stainless steel.

5 levels of horizontal presentation in safety glass. (D:23 3/8 x W:39,3/4)x5.

Available height between shelves: :11,26 in

Total presentation capacity: i.e. the capacity of 50/100 shelled poultry

Digital display and electronic temperature control. Showcase lighting by LEDs.

Extinguishment of the heating of the shelves independently by switch.

Loading of products by level at the rear using hatches (in transparent PMMA) and at the front using a KGLASS glass door.

Furniture equipped with adjustable feet. Flat securit glass headband ref: GLP10MCV.

Power suply: 230 Volts 1 Phase + Neutral + Ground (~60Hz) on specific line 20 Amps,

Electrical power: 4,32 KW, wire length: 80 in.

OPTIONS: basket.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of company Rotisol.

Poliso Scale: 1/25 December 2023