



OVEN/BASKETS ROTISSERIES ROTI-ROASTER FORCED AIR REF.: FBP8.720


SIDE VIEW



FRONT VIEW




SIDE VIEW



Electrical supply
208-240V~60Hz


ROTI-ROASTER

TOP VIEW

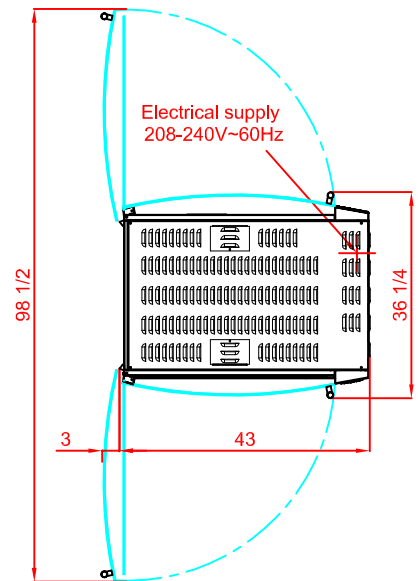


Electrical supply
208-240V~60Hz

Glass protection
K.GLASS



Brake wheel base
(Optional)



"K.GLASS" protection

Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Weight: 375Lbs, Capacity of poultries: 32/40, Number of baskets: 8.

Stainless presentation inside with central axis, support and removable swing trays.

Digital control of the temperature and time. Alarm at end of cooking cycle.

2 through glass door (anti-burns K.Glass) fitted on removable silicon joint.

Safety glass and screen-printed double glazed curved to one side ref. GLBS8720

Internal lighting by 2 halogen lamps protected by glass cover.

Power supply Volts 3 Phases + Earth (208-240V~60Hz), **Electrical power 8,5 kW; 24 Amps** , wire length: 6'

Provide extraction hood of a flow of 885 to 1180 cu ft/min with speed variator

OPTIONS AND ACCESSORIES: brake wheel base ref. FBP8.72PR, 4 adjustable feet ref. FBP.PIED, frontage color ref. COUL, and silkscreened glass securit double glazed curved face for a ref. GLBS8720, baskets small pieces ref. BAP720, vegetables tray ref. PD720.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.