


# ROTISSERIE GRANDFLAME GAS

REF: GF1375.3G.SS or 1375.3G.SSP or 1375.3G.LUX

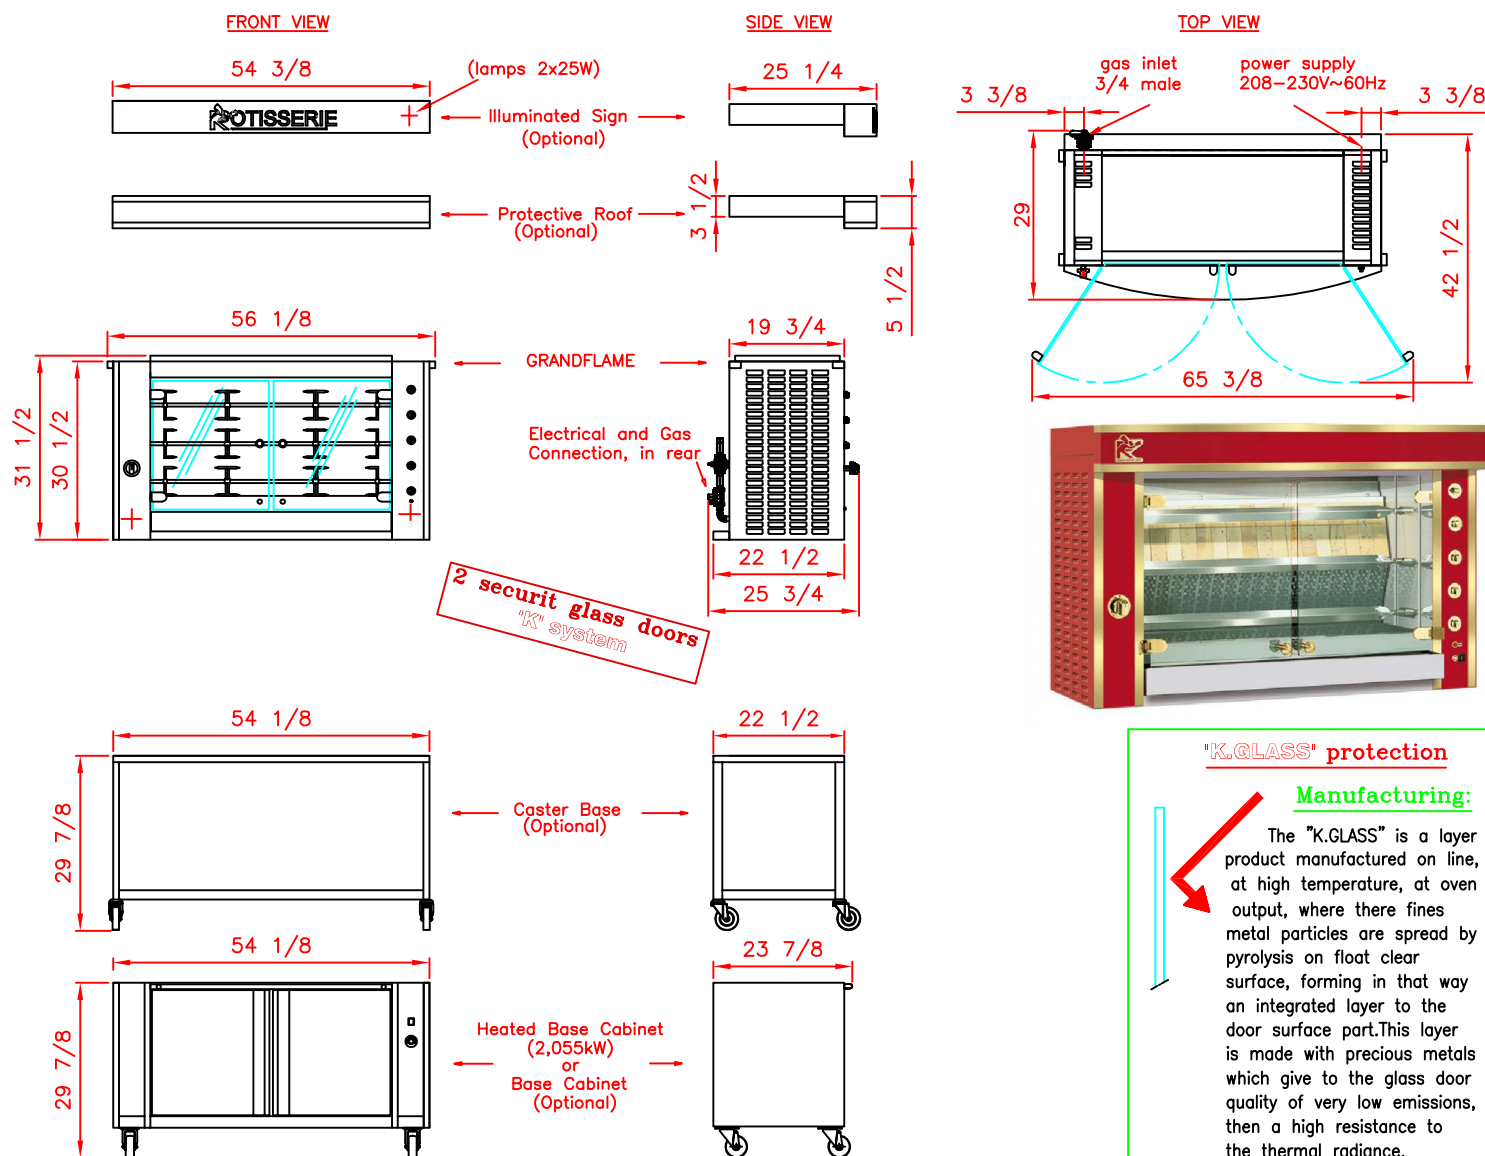

## "K.GLASS" protection

### Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

## SPECIFICATIONS

Weight: 220 Lbs, Weight packed without base cabinet: 353 Lbs,

Weight packed with base cabinet : 606 Lbs

Capacity: 15/18 chickens, 3 ajustable spits

Full body porcelain enamel with brass or chrome for rotisserie ref: GF1375.3G.LUX

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: GF1375.3G.SSP

All stainless steel with brass or chrome rotisserie ref: GF1375.3G.SS

with protective glass doors K'Glass

**Power supply: 1 phase+neutral+earth (208-230V~60Hz), 1,88 Amps. Wire length: 6'.**

**Electrical power 0,39 kW made up of:**

\_3 motors of 50W, 2 halogen lamps of 150W, 2 lamps of 25w for illuminated sign.

**Natural gas power: 41000 BTU/h**

OPTIONS: spécific colours, caster base ref: 1375PR, base cabinet ref: 1375SRS, 1375SRiL or 1375SRL,

heated base cabinet with doors ref: 1375SCS, 1375SCiL or 1375SCL (2.055 kW, 10 Amps add to the electric

power of the rotisserie), with drawers ref: 1375SBCS, 1375SBCiL or 1375SBCL (2.055 kW, 10 Amps add to

the electric power of the rotisserie). Illuminated sign ref: 1375BDI or 1375BDE, protective roof ref: 1375TPS,

1375TPiL or 1375TPL, gas connection, sensor grease ref: 1375CAPTS or 1375CAPTL, cooking timer with alarm.

OPTIONS, ACCESSOIRES: spits, vertical spit system, prongs, spit mover, gas lighter, grills, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.