


# ROTISSERIE GRANDFLAME ELECTRICAL

REF: GF1375.5E.SS or GF1375.5E.SSP or GF1375.5E.LUX

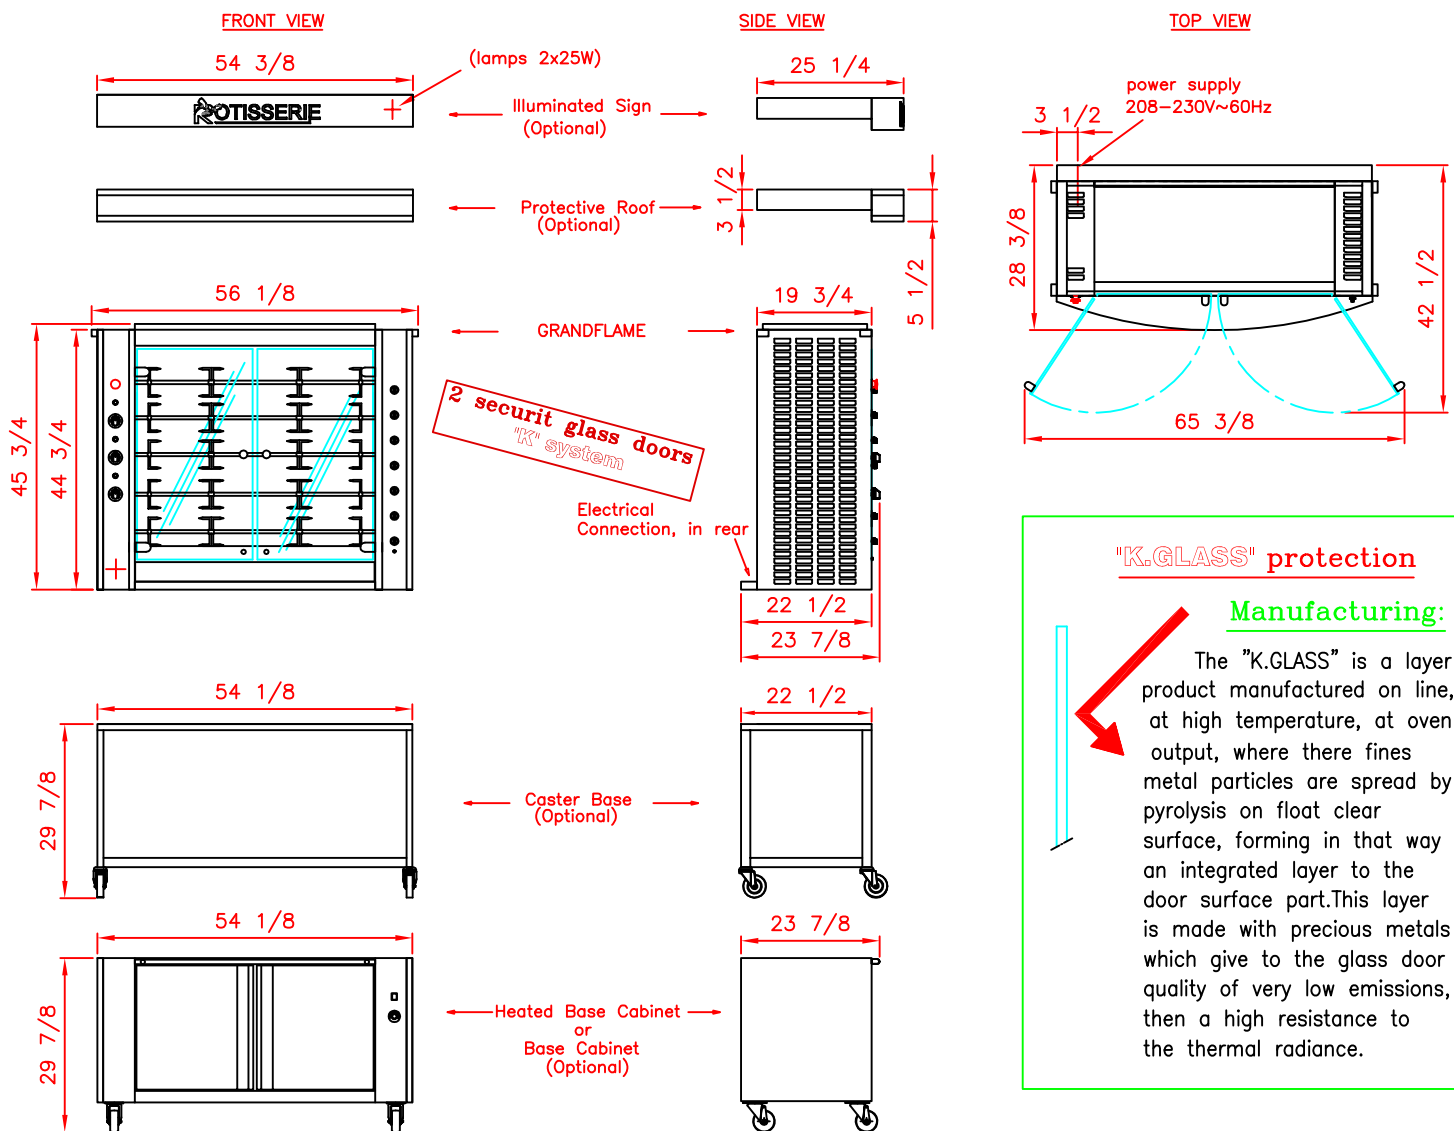

## "K.GLASS" protection

### Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

## SPECIFICATIONS

Weight: 330 Lbs, Weight packed without base cabinet: 465 Lbs

Weight packed with base cabinet : 685 Lbs

Capacity: 25/30 chickens, 5 ajustable spits

Black enamel and stainless steel for rotisserie ref: 1375.5MSE (standard)

Black enamel and brass or stainless steel trim for rotisserie ref: 1375.5MLE (deluxe)

All stainless steel rotisserie ref: 1375.5MiE (stainless steel)

with protective glass doors K'Glass

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 66,5 Amps, wire length: 6'

Electrical power 23,85 kW made up of:

\_15 resistors of 1,55 kW, 5 motors of 50W and 2 halogen lamps of 150W, 2 lamps of 25w for illuminated Sign

OPTIONS: spécific colours, caster base ref: 1375PR, base cabinet ref: 1375SRS or 1375SRL, heated base cabinet with doors ref: 1375SCS or 1375SCL, with drawers ref: 1375SBCS or 1375SBCL.

Illuminated Sign ref: 1375BDI or 1375BDE, protective roof ref: 1375TPS or 1375TPL,

sensor grease ref: 1375CAPTS or 1375CAPTL, cooking timer with alarm.

OPTIONS, ACCESSOIRES: spits, vertical spit system, prongs, spit mover, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.