


# ROTISSERIE GRANDFLAME ELECTRICAL

## REF: GF975.8E.SS or 975.8E.SSP or 975.8E.LUX

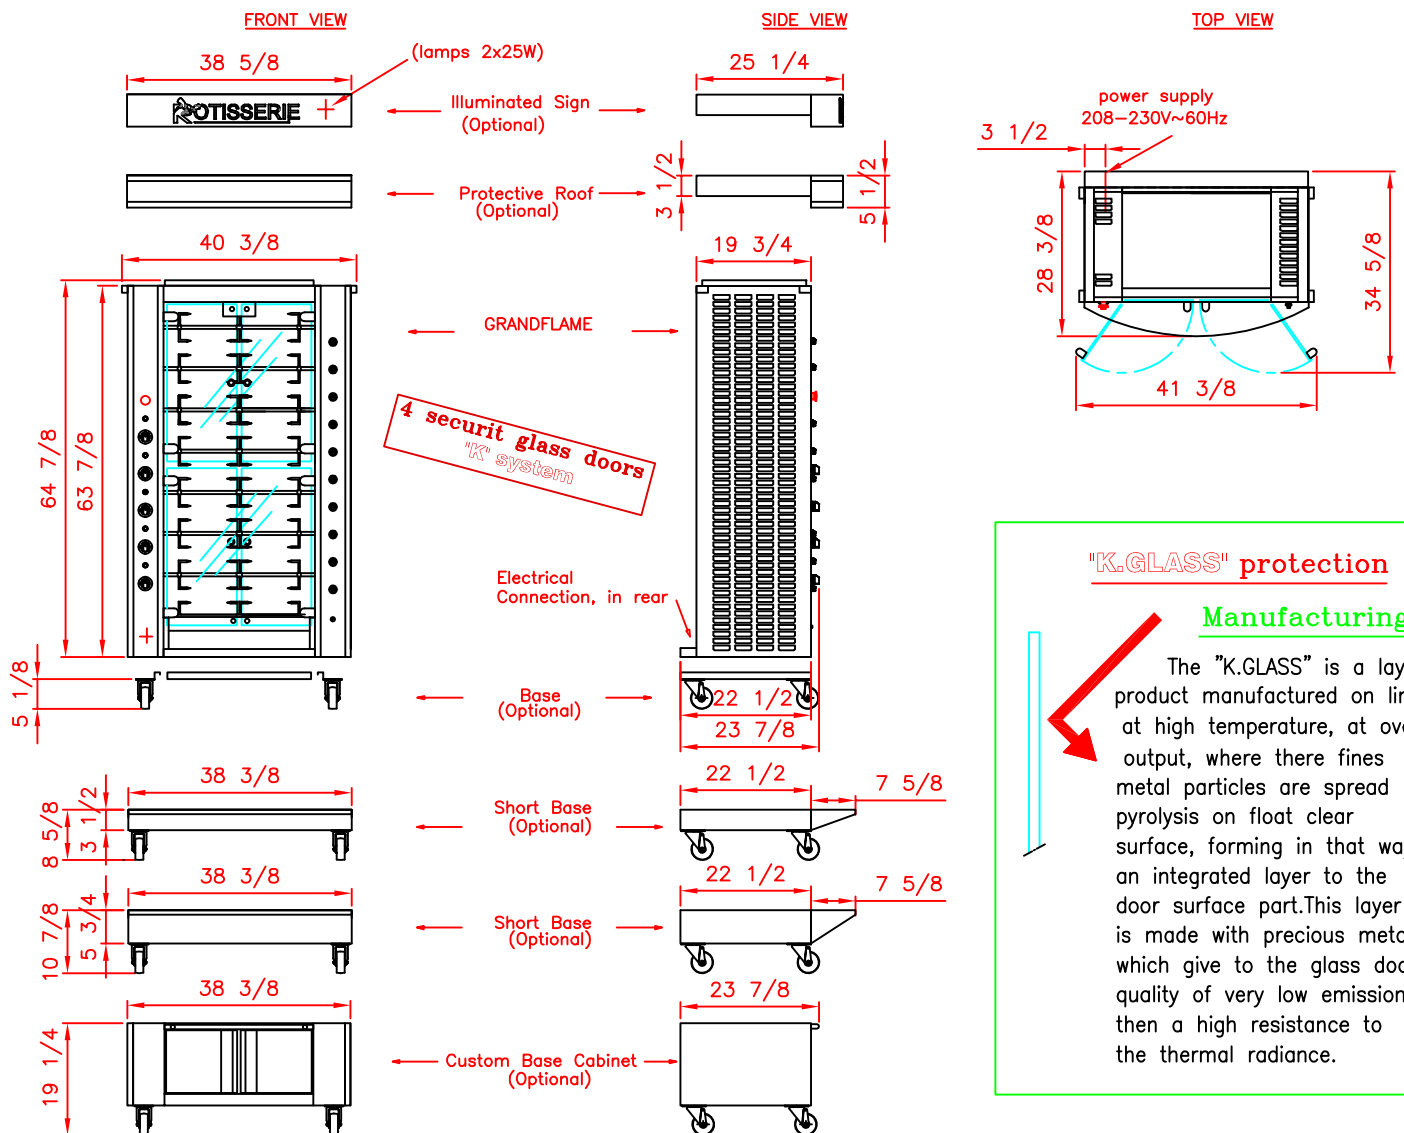

### "K.GLASS" protection

#### Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

### SPECIFICATIONS

Weight: 350 Lbs, Weight packed without base cabinet: 440 Lbs,

Weight packed with base cabinet : 505 Lbs

Capacity: 16/24 chickens, 8 ajustable spits

Full body porcelain enamel with brass or chrome for rotisserie ref: GF975.8E.LUX

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: GF975.8E.SSP

All stainless steel with brass or chrome rotisserie ref: GF975.8E.SS

with protective glass doors K'Glass

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 61 Amps, wire length: 6'.

Electrical power 21,49 kW made up of:

\_21 resistors of 1 kW, 8 motors of 50W and 1 halogen lamp of 150W, 2 lamps of 25w for illuminated Sign

OPTIONS: spécific colors, base ref: 975SR, base cabinet for unspitting ref: 975DEBS or ref: 975DEBL, short base ref: 975DEBSHORT or ref: 975DEBSHORT275. Illuminated sign ref: 975BDI or 975BDE,

Protective roof ref: 975TPS or 975TPL, sensor grease ref: 975CAPTS or ref: 975CAPTL, cooking timer with alarm.

OPTIONS, ACCESSOIRES: spits, vertical spit system, prongs, spit mover, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.