



RÔTISSERIE

MINI-CONCEPT ROTI-ROASTER

5.520iF2LSP8

ROTI-ROASTER MINI-CONCEPT

Mini rotisserie concept to save space, energy

The mini rotisserie : Optimisation of a space with a self-service display, 2 presentation levels in stainless steel inclined at 10°, with digital display and electronic temperature control, mounted on castors with brakes.

Topped by a programmable roaster convection Roti-Roaster with baskets or chicken spits, electronic programming time and temperature with digital display and alarm after cooking cycle and then maintaining the temperature at 145 ° F with a program of pre-cooking, six cooking programs with security convex glass and double glass on service side.

Digital Display with programming of cooking parameters (time and temperature)

Pre heat program

6 cooking program







Controls on front or rear of the Roti-Roaster




5.520iF2LSP8

ACCESSORIES


A variety of accessories are available. See [video](#) of available accessories.

BALD520 Chicken baskets standard.		BAP520 Small cuts baskets.		BAB520 Big pieces of meat spit.	
PD520 Stainless steel rack top.		BCRA520 Spatchcock chicken baskets.		TP5520 Protective roof.	



Front view
client side
Top view

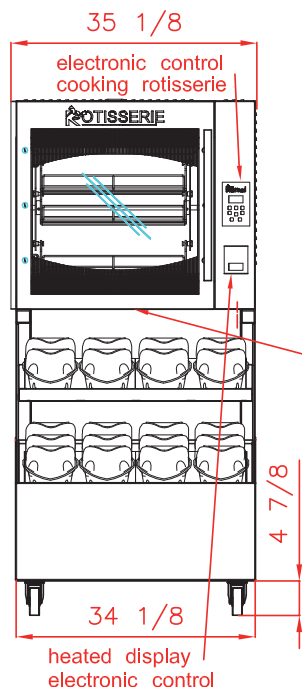

Side view

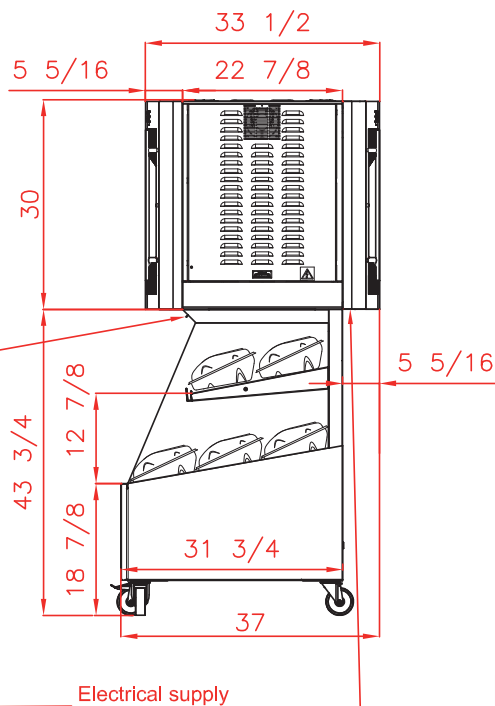

Rear view
service side

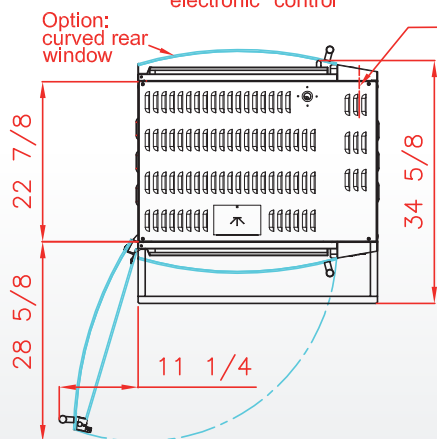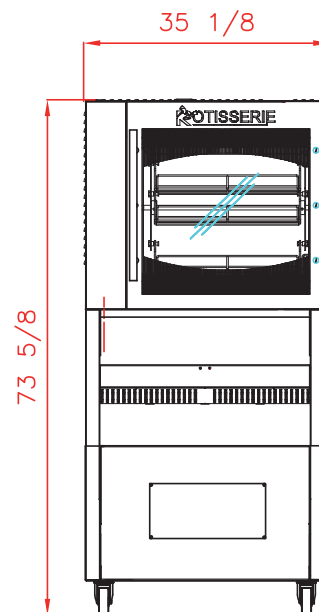

Revised :
September 2021

SPECIFICATIONS

Capacity roasted chickens	15/20 chickens, 5 baskets/spits
Display capacity	20 chickens
Power supply	208-240V~60Hz ; 3 Phases + Ground
Electrical power	29 Amps ; 5,9 kW
Weight and size (HxDxW)	474 Lbs ; 73 5/8 x 37 x 35 1/8 inches
Shipping weight and size	584 Lbs ; 81 1/8 x 40 5/8 x 36 5/8 inches
Warranty	1 year parts and labor



5.520iF2LSP8

DISTRIBUTOR / AGENT

Rotisol France, Inc.
1450 W. 228th Street, Unit 10, TORRANCE, CA 90501
info@rotisolusa.com
Ph :310 671 7254