



RÔTISSERIE

MINI-CONCEPT ROTI-ROASTER

8.520iF2LSP8

ROTI-ROASTER MINI-CONCEPT

Mini rotisserie concept to save space, energy

The mini rotisserie : Optimisation of a space with a self-service display, 2 presentation levels in stainless steel inclined at 10°, with digital display and electronic temperature control, mounted on castors with brakes.

Topped by a programmable roaster convection Roti-Roaster with baskets or chicken spits, electronic programming time and temperature with digital display and alarm after cooking cycle and then maintaining the temperature at 145 ° F with a program of pre-cooking, six cooking programs with security convex glass and double glass on service side.

Digital Display with programming of cooking parameters (time and temperature)

Pre heat program

6 cooking program

Controls on front or rear of the Roti-Roaster




8.520iF2LSP8

ACCESSORIES


A variety of accessories are available. See [video](#) of available accessories.

BALD520 Chicken baskets standard.		BAP520 Small cuts baskets.		BAB520 Big pieces of meat spit.	
PD520 Stainless steel rack top.		BCRA520 Spatchcock chicken baskets.		TP8520 Protective roof.	


Front view
client side
Top view

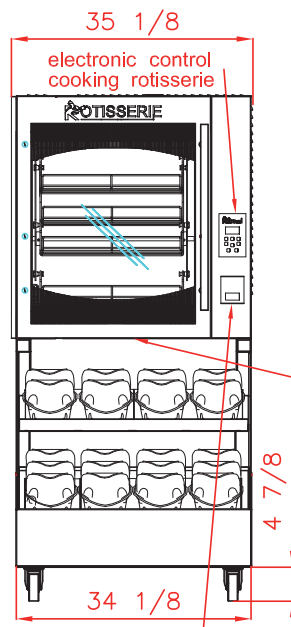


Side view

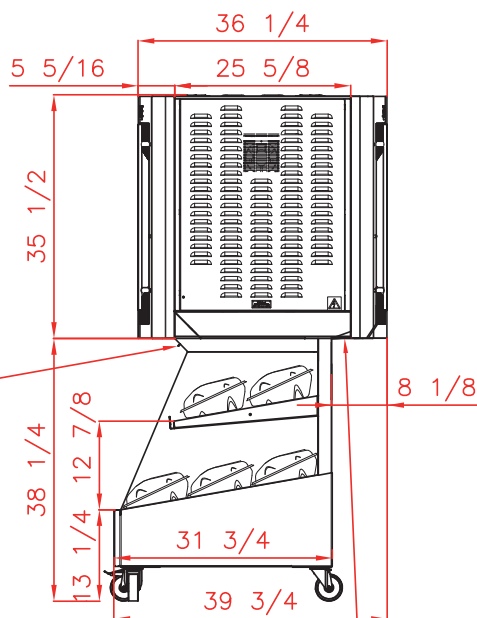

Rear view
service side

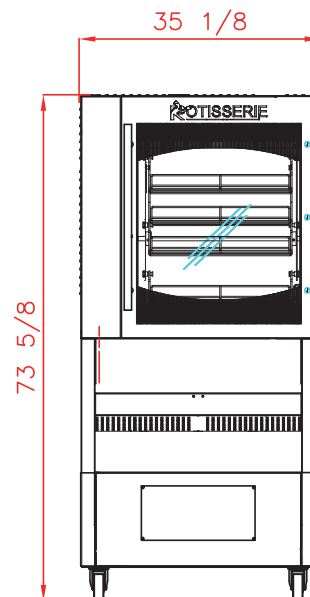

Option:
curved rear
window

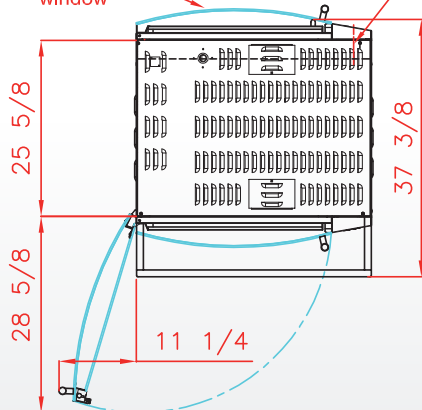

Electrical supply
208-240V~60Hz



Revised :
September 2021

SPECIFICATIONS

Capacity roasted chickens	24/32 chickens, 8 baskets/spits
Display capacity	20 chickens
Power supply	208-240V~60Hz ; 3 Phases + Ground
Electrical power	36 Amps ; 7,5 kW
Weight and size (HxDxW)	530 Lbs ; 73 5/8 x 39 3/4 x 35 1/8 inches
Shipping weight and size	650 Lbs ; 81 1/8 x 44 1/2 x 36 5/8 inches
Warranty	1 year parts and labor



8.520iF2LSP8

DISTRIBUTOR / AGENT