


ROTISSERIE GRANDFLAME ELECTRICAL

REF: GF1375.8E.SS or 1375.8E.SSP or 1375.8E.LUX

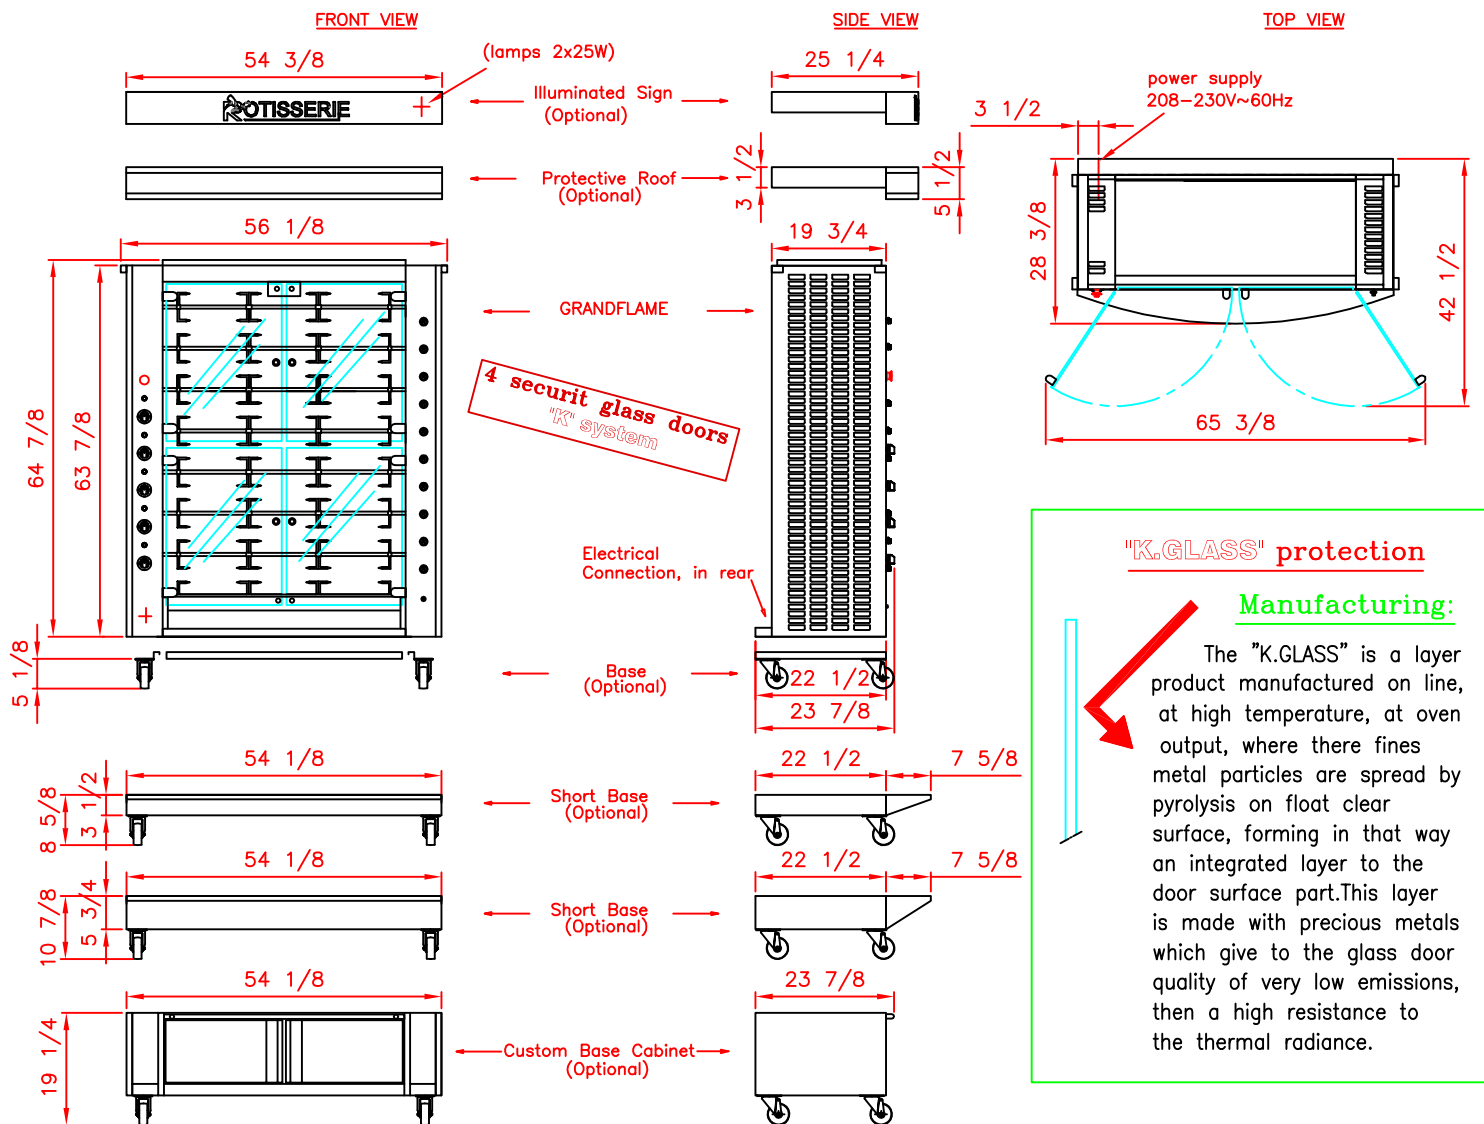

"K.GLASS" protection

Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Weight: 530 Lbs, Weight packed without base cabinet: 640 Lbs,

Weight packed with base cabinet : 728 Lbs

Capacity: 40/48 chickens, 8 ajustable spits

Full body porcelain enamel with brass or chrome for rotisserie ref: GF1375.8E.LUX

Stainless steel with porcelain enamel or specialty metal front panels for rotisserie ref: GF1375.8E.SSP

All stainless steel with brass or chrome rotisserie ref: GF1375.8E.SS

with protective glass doors K'Glass

Power supply: 3 Phases+Neutral+earth (208-230V~60Hz); 92,5 Amps, wire length: 6'.

Electrical power 33,19 kW made up of:

_21 resistors of 1,55 kW, 8 motors of 50W and 2 halogen lamps of 150W, 2 lamps of 25w for illuminated Sign

OPTIONS: spécific colors, base ref: 1375SR, base cabinet for unspitting ref: 1375DEBS or ref: 1375DEBL,

short base ref: 1375DEBSHORT or ref: 1375DEBSHORT275. Illuminated sign ref: 1375BDI or 1375BDE,

Protective roof ref: 1375TPS or 1375TPL, sensor grease ref: 1375CAPTS or ref: 1375CAPTL, cooking timer with alarm.

OPTIONS, ACCESSOIRES: spits, vertical spit system, prongs, spit mover, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.