



ROTISSERIE MASTERFLAME ELECTRICAL

REF: MF1375-6E-SS or MF1375-6E-LUX


FRONT VIEW

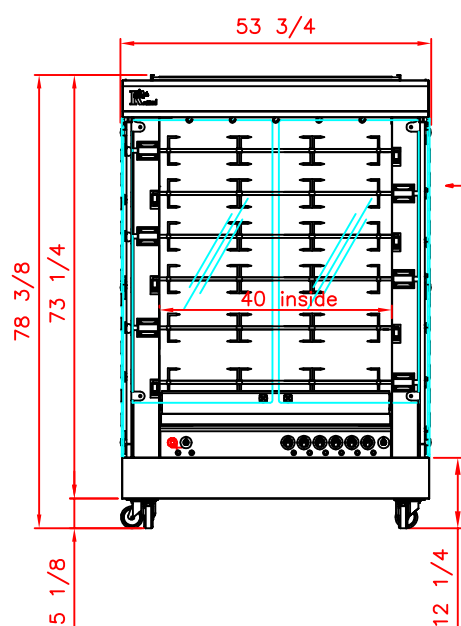


SIDE VIEW

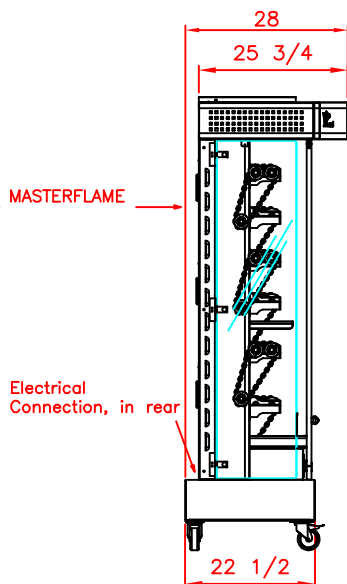

TOP VIEW

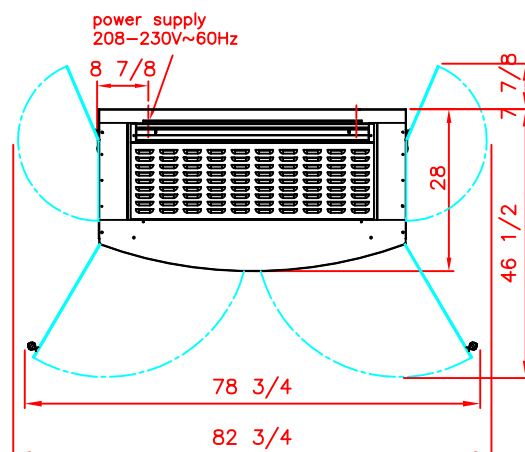

4 securit glass doors
"K" system

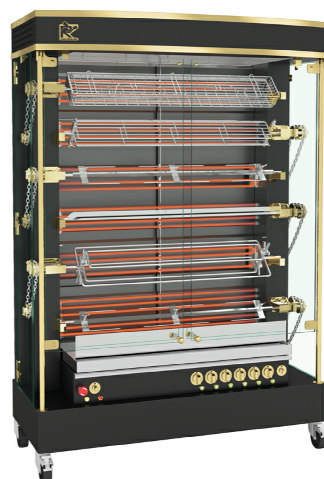

"K.GLASS" protection

Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part. This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Capacity: 30/36 poultries, Weight: 783 Lbs

Luxury black enamel version with brass or stainless steel fittings ref: MF1375-6E-LUX

Deluxe stainless steel version with brass or stainless steel fittings ref: MF1375-6E-SS

6 adjustable spits + alternative system of vertical spits with 5 hooks integrated

K'GLASS protection windows with spit rotation stop when doors open.

4 casters, 2 with brakes.

Power supply: 3 phases+earth (208-230V~60Hz); 103 Amps, wire length: 2 meters.

Electrical power 37 kW made up of:

_13 resistors of 2.8 kW, 7 motors of 40W, 2 halogen lamps of 150W.

OPTIONS: Enamel specific color ref: COUL 1.

ACCESSORIES: Spits, prongs, spit mover, rack and trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.